



imageRUNNER 2600 Series

ROBUST, RELIABLE AND HIGHLY EFFICIENT A3 MONO MULTIFUNCTION PRINTERS

The ultimate document solution devices designed to excel in a modern office environment



PRODUCTIVITY



MOBILE CONNECTIVITY



**CONTROL AND
MAINTENANCE**



USER EXPERIENCE



SECURITY

Canon

imageRUNNER 2600 Series



PRODUCTIVITY

- Fast print outputs and first copy out time (FCOT)
- Customisation of on-screen applications increases workflow efficiency
- Scan and convert documents to searchable PDF, Microsoft Word or Power Point files
- Print Hold function for a convenient final adjustment of print setting before job release
- Smart media handling enables up to 30 paper types registration and automated size detection
- Space saving optional inner finisher with staple-free binding and integrated manual stapling



USER EXPERIENCE

- Intuitive operation via a large colour touchscreen with smartphone like usability
- Advanced personalisation and customisation options tailored for user's workflow needs
- Integrated Home UI enables choice of frequently used settings from a single menu
- Automatic recovery from sleep mode* by placing paper on DADF or opening platen glass
- Innovative production processes, including welded frame, ensure lasting machine longevity and reliability

*imageRUNNER 2645i only

- Easy replacement of toner cartridge featuring anti-spill technology
- Compact design allows for a convenient office arrangements



SECURITY

- Verify system at start-up enables preventative security measures to protect device from unauthorised modifications
- Advanced device and cloud-based authentication options
- Central control of security settings reduces administrator burden
- Encrypted PDF, plus device and optional user signature PDF provide additional authentication security levels
- Secure PIN and Forced Hold Print enhance document confidentiality
- Further actions to counter malware attack on the network include third party SIEM system integration
- Ensure data privacy across your network with IPsec and port filtering



MOBILE CONNECTIVITY

- Wireless LAN and QR code connection options for working from tablets and smartphones

- Mobile compatible remote UI with optimised display layout allows users to change the settings of print jobs on the go
- Support for Mopria, Apple Air Print, Google Cloud Print and Windows 10 Print
- Canon's PRINT Business app adds further functions to printing and scanning from mobile devices
- Status of the machine and consumables can be read from the connected mobile devices



CONTROL AND MAINTENANCE

- Centrally manage all devices on the network with cloud-based remote management options
- Remote Operators Software Kit provides alternative access to device, simulating control panel and hard keys on a network PC screen for remote operation of all system functions
- Compatibility with Canon's uniFLOW software solutions allows for tracking and reporting of print jobs
- e-Maintenance can improve uptime through remote diagnostics, automated meter readings and consumables monitoring

QUICK FACTS

imageRUNNER 2625i

- Print, Copy, Scan, Send and optional Fax
- 7-inch/17.8cm WVGA colour touchscreen
- Print Speed: 25ppm (A4)
- Print resolution: 1,200x1,200 dpi
- Automatic double-sided printing
- Platen or DADF option (50 sheet capacity)
- Scan speed: 25ipm (A4, Mono/CL)
- Network, Wi-Fi, USB and QR code connectivity
- Max paper input capacity: 2,300 sheets

imageRUNNER 2630i

- Print, Copy, Scan, Send and optional Fax
- 7-inch/17.8cm WVGA colour touchscreen
- Print Speed: **30ppm** (A4)
- Print resolution: 1,200x1,200 dpi
- Automatic double-sided printing
- **DADF standard** (50 sheet capacity)
- Scan speed: **30ipm** (A4, Mono/CL)
- Network, Wi-Fi, USB and QR code connectivity
- Max paper input capacity: 2,300 sheets

imageRUNNER 2645i

- Print, Copy, Scan, Send and optional Fax
- 7-inch/17.8cm WVGA colour touchscreen
- Print Speed: **45ppm** (A4)
- Print resolution: 1,200x1,200 dpi
- Automatic double-sided printing
- **DADF standard (100 sheet capacity)**
- Scan speed: **55ipm** (A4, Mono/CL)
- Network, Wi-Fi, USB and QR code connectivity
- **Automatic recovery from sleep mode**
- Max paper input capacity: 2,300 sheets

SERVICES

CORE

Perform routine office operations safely and with ease, utilising embedded software including uniFLOW Online Express and other available services offering complete device maintenance and support



HARDWARE



SOFTWARE



SERVICES

BESPOKE

Choose a tailored service to suit your business needs by removing unnecessary print management burdens. Consult with Canon experts about your specific requirements to find a fitting Print Managed Services option

ENHANCED

Expand cloud capabilities with uniFLOW Online, Canon's all-in-one print management system

Canon

Canon Inc.
canon.com


Canon Europe
canon-europe.com

English edition
© Canon Europa N.V., 2019

imageRUNNER 2600 Series

ROBUST, RELIABLE AND HIGHLY EFFICIENT A3 MONO MULTIFUNCTION PRINTERS

MAIN CONFIGURATION OPTIONS

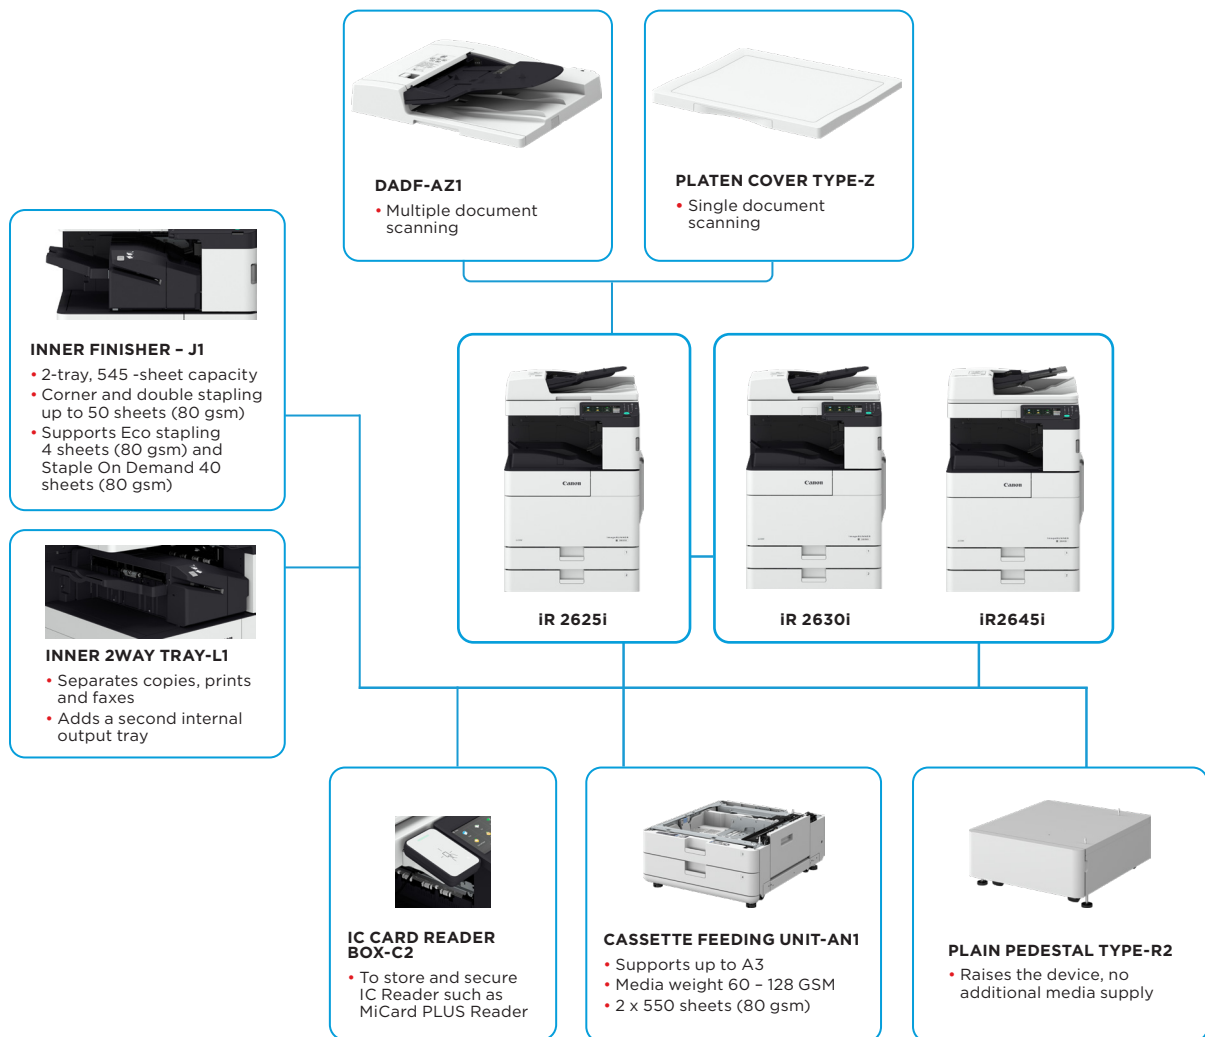

This flat configuration is for illustration purpose only. For a complete list of options and the exact compatibility, please refer to the Online Product Configurator or consult your sales representative.

TECHNICAL SPECIFICATIONS

imageRUNNER 2600 Series

MAIN UNIT

Machine type	A3 Monochrome Laser Multifunctional
Core functions	Print, Copy, Scan, Send and Optional Fax
Processor	Canon Dual Custom Processor(Shared)
Control Panel	Standard: 17.8 cm/7 TFT LCD WSVGA Colour Touch panel
Memory	Standard: 2.0GB RAM
Interface Connection	NETWORK Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE 802.11 b/g/n) OTHERS Standard: USB 2.0 (Host) x3, USB 2.0 (Device) x1
Paper Supply Capacity (A4, 80gsm)	Standard: 1,200 sheets Maximum: 2,300 sheets (with Cassette Feeding Unit-AN1)
Paper output capacity (A4, 80gsm)	Standard: 250 sheets Maximum: 545 sheets (with Inner Finisher-J1)
Finishing Capabilities	Standard model: Collate, Group Finisher model(Inner Finisher-J1): Collate, Group, Offset, Staple-Free Staple, Staple on Demand
Supported Media Types	Paper Cassette (1/2): Thin, Plain, Thick, Colour, Recycled, Pre-punched Multi-purpose Tray: Thin, Plain, Thick, Colour, Recycled, Pre-punched, Transparency, Tracing*, Label, Bond, Envelope *Some types of tracing paper cannot be used.
Supported Media Sizes	Upper Cassette 1: Standard size: A4, A4R, A5R, B4, B5, B5R Custom size: Min. 139.7 x 182.0 mm up to 297.0 x 390.0 mm Lower Cassette 2: Standard size: A3, A4, A4R, A5R, B4, B5, B5R Custom size: Min. 139.7 x 182.0 mm up to 297.0 x 431.8 mm Multi-purpose tray: Standard size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, Envelopes [No. 10(COM 10), Monarch, ISO-C5, DL] Custom Size/Free Size: Min. 98.0 x 148.0 to 297.0 x 431.8 mm
Supported Media Weights	Paper Cassettes (1/2): 60 to 128 gsm Multi-purpose Tray: 52 to 220 gsm (Thin: vertical grain paper feed only: 52 to 59 gsm) Duplex: 60 to 105 gsm
Warm-up Time (With Quick Start Up Mode On)	12 seconds or less * * Time from device power-on until copy ready (not print reservation) From Sleep Mode: 10 seconds or less 4 seconds or less* *Time from device power-on to when key operations can be performed on the touch panel display.
Dimensions (W x D x H)	iR 2645i: 586 x 709 x 926 mm iR 2630i: 586 x 713 x 912 mm iR 2625i: 586 x 713 x 912 mm (with DADF-AZ1) 586 x 700 x 818 mm (with Platen Cover type Z)
Installation Space (W x D)	iR 2645i: 1363 x 1269 mm* iR 2630i: 1363 x 1273 mm* iR 2625i: 1363 x 1273 mm (with DADF-AZ1)* 1363 x 1260 mm (with Platen Cover type Z)* *with Cassette open + 100 mm gap around the main body
Weight	iR 2645i: Approx. 75.5 kg without toner iR 2630i: Approx. 73.6 kg without toner iR 2625i: Approx. 73.6 kg without toner (with DADF-AZ1) Approx. 66.8 kg without toner (with Platen Cover type Z)
PRINT SPECIFICATIONS	
Print Speed(BW)	iR 2645i: 45 ppm (A4), 22 ppm (A3), 32 ppm (A4R), 20ppm (A5R) iR 2630i: 30 ppm (A4), 15 ppm (A3), 21 ppm (A4R), 17 ppm (A5R) iR 2625i: 25 ppm (A4), 15 ppm (A3), 17 ppm (A4R), 17 ppm (A5R) 1,200 x 1,200
Print Resolution (dpi)	Standard: UFR II, PCL 6
Page description languages	Optional: Genuine Adobe PostScript Level 3
Direct Print	Direct printing available from USB memory and Remote UI. Supported file types: PDF, EPS,TIFF, JPEG and XPS
Printing from mobile and cloud	AirPrint, Mopria, Google Cloud Print, Canon PRINT Business and uniFLOW Online A range of software solutions is available to provide printing from mobile devices and cloud-based services depending on your requirements. Please contact your sales representative for further information

Fonts

PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT J/K/S/T*1 (Japanese, Korean, Simplified and Traditional Chinese) , Barcode fonts*2
PS fonts: 136 Roman

*1 Requires optional PCL International Font Set-A1

*2 Requires optional Barcode Printing Kit-D1

Print Features

Suspend Job Timeout, Profile Settings, Secure Print, Header/Footer, Page Layout, Two-sided Printing, Collating, Booklet Printing, Grouping, Mixed Paper Sizes/ Orientations, Offsetting, Toner Reduction, Poster Printing, Forced Hold Printing

Operating System

UFR II: Windows* 7/8.1/10/Server 2008 /Server 2008 R2/ Server 2012/Server 2012 R2/Server 2016/Server 2019, MAC OS X (10.9 or later)

PCL: Windows* 7/8.1/10/Server 2008/Server 2008 R2/ Server 2012/Server 2012 R2/Server 2016/Server 2019

PS: Windows* 7/8.1/10/Server 2008/Server 2008 R2/ Server 2012/Server 2012 R2/Server 2016/Server 2019, MAC OS X (10.9 or later)

PPD: Windows* 7/8.1/10, MAC OS X (10.9 or later)

COPY SPECIFICATIONS

Copy Speed

iR 2645i:
45 ppm (A4), 22 ppm (A3), 32 ppm (A4R), 20ppm (A5R)

iR 2630i:
30 ppm (A4), 15 ppm (A3), 21 ppm (A4R), 17 ppm (A5R)

iR 2625i:
25 ppm (A4), 15 ppm (A3), 17 ppm (A4R), 17 ppm (A5R)

iR 2645i: Approx. 3.9 seconds or less

iR 2630i/2625i: Approx. 5.9 seconds or less

First-Copy-Out Time (A4)

Copy resolution (dpi)

Reading: 600 × 600

Printing: Up to 1,200 x 1,200

Up to 9,999 copies

Multiple Copies

Copy Density

Automatic or Manual (9 Levels)

Magnification

25% - 400% (1% Increments)

Preset Reductions

25%, 50%, 61%, 70%, 81%, 86%

Preset Enlargements

115%, 122%, 141%, 200%, 400%

Basic Copy Features

Preset R/E Ratios by Area, Paper Setting, Previous Setting, Favourite Setting, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Setting Confirmation/Cancel

Special Copy Features

Book to Two Pages, Two-sided Original, Finishing, Booklet, Job Build, N on 1, Different Size Originals, Density Adjustment, Original Type Selection, Sharpness, Erase Frame, Shift, Gutter, Job Done Notice, Copy ID Card, Free Size Original

SCAN SPECIFICATIONS

Selectable type

iR2645i: Standard Document Feeder (DADF-BA1)
iR2630i: Standard Document Feeder (DADF-AZ1)
iR2625i: Optional Document Feeder (DADF-AZ1) or Platen Cover Type Z

Document Feeder Paper Capacity (80 gsm)

DADF-BA1: 100 Sheets
DADF-AZ1: 50 Sheets

Acceptable Originals and weights

Platen (DADF-BA1):
Sheet, Book, 3-Dimensional Objects
Platen (DADF-AZ1):
Sheet, Book

Document Feeder media weight :
DADF-BA1 :

1-sided scanning: 38 to 128 gsm (BW), 64 to 128 gsm (CL)*
2-sided scanning: 50 to 128 gsm (BW), 64 to 128 gsm (CL)

* Only 1-sheet feeding is supported in 38-42 gsm. (Feeding is guaranteed but geometric distortion correction is not guaranteed)

DADF-AZ1 :

1-sided scanning: 38 to 128 gsm (BW/CL)*

2-sided scanning: 38 to 128 gsm (BW/CL)*

* Only 1-sheet feeding is supported in 38-52 and 105-128 gsm. (Feeding is guaranteed but geometric distortion correction is not guaranteed)

Supported media sizes

Platen: max. scanning size: 297.0 x 431.8 mm

Document Feeder media size:

DADF-BA1: A3, A4, A4R, A5, A5R, B5, B5R, B6, B4R
Custom size: 128.0 x 139.7 mm to 297.0 x 431.8 mm

DADF-AZ1: A3, A4, A4R, A5, A5R, B5, B5R, B4R
Custom size: 128.0 x 148.0 mm to 297.0 x 431.8 mm

Scan Speed (ipm: BW/CL; A4)

DADF-BA1:

1-sided Scanning: 55/55 (300 dpi), 45 (BW; 600 dpi)
2-sided Scanning: 27.5/27.5 (300 dpi), 22.5 (BW; 600 dpi)

DADF-AZ1:

1-sided Scanning:35/25 (300 dpi), 25 (BW; 600 dpi)
2-sided Scanning:12/8 (300 dpi), 8 (BW; 600 dpi)



TECHNICAL SPECIFICATIONS

imageRUNNER 2600 Series

Scan Resolution (dpi)	Copy: 600 x 600 Send: (Push) up to 600 x 600, (Pull) up to 600 x 600 Fax: up to 600 x 600	Data	Optional: Data Loss Prevention (Requires uniFLOW)
Pull Scan Specifications	Colour Network ScanGear2. For both TWAIN and WIA Supported OS: Windows* 7/8.1/10 Windows* Server 2008/Server 2008 R2/Server 2012/Server 2012 R2/Server 2016	Network	Standard: IP/Mac Address Filtering, IPSEC, TLS Encrypted Communication, SNMP V3.0, IEEE 802.1X, IPv6, SMTP Authentication, POP Authentication before SMTP, S/MIME
Scan Method	Send functionality available on all models Scan to USB Memory Key: Available on all models Scan to Mobile Devices and cloud-based services: A range of solutions is available to provide scanning to mobile devices or cloud-based services depending on your requirements. Please contact your sales representative for further information. TWAIN/WIA Pull scanning available on all models	Document	Standard: Secure Print, Encrypted PDF, Encrypted Secure Print, Device signature Optional: User signature
SEND SPECIFICATIONS		ENVIRONMENTAL SPECIFICATIONS	
Destination	E-mail/Internet FAX (SMTP), SMB, FTP, WebDAV, Super G3 FAX (Optional)	Operating Environment	Temperature: 10 to 30 °C (50 to 86 °F) Humidity: 20 to 80 % RH (Relative Humidity)
Address Book	LDAP (2,000)/Local (1,600)/Speed dial (200)	Power source	220-240 V , 50/60 Hz , 5.2 Amp
Send resolution (dpi)	Push: 600 x 600 Pull: 600 x 600, 400 x 400, 300 x 300, 200 x 200, 150 x 150, 75 x 75	Plug (Main Unit)	CEE7/7
Communication protocol	File: FTP (TCP/IP), SMB (TCP/IP), WebDAV E-mail/I-Fax: SMTP (send), POP3 (receive)	Power consumption	Maximum: Approx. 1500W Standby: Approx. 20W Sleep mode: Approx. 1.0W Plugin Off: Approx. 0.4W Typical Electricity Consumption (TEC)* :
File Format	Standard: TIFF (MMR), JPEG*, PDF (Compact, Searchable, PDF A/1-b, Encrypted), XPS (Compact, Searchable), PDF/XPS (Device Signature), Office Open XML (PowerPoint, Word) Optional: PDF (Trace & Smooth), PDF/XPS (User Signature) *Single page only	Noise levels (BW/CL)	iR 2645i: 0.69 kWh iR 2630i: 0.45 kWh iR 2625i: 0.38 kWh *As per US ENERGY STAR* version 3.0 Sound Power Level (LwAd) Active: iR 2645i: 73.1 dB or Less* ¹ iR 2630i: 71.0 dB or Less* ¹ iR 2625i: 70.2 dB or Less* ¹ Standby: No noise* ² No noise means that the emission sound pressure level of each bystander position is lower than the absolute standard with the background noise of ISO 7779.
Universal Send Features	Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Erase Frame, Job Build, Sender's Name (TTI), Direct Send, Delayed Send, Preview, Finished Stamp, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation		Sound Pressure Level (LpAm) (Reference) Bystander's position: Active: iR 2645i: 1-sided: LpAm 52 dB, 2-sided: LpAm 55 dB iR 2630i: 1-sided: LpAm 50 dB, 2-sided: LpAm 53 dB iR 2625i: 1-sided: LpAm 50 dB, 2-sided: LpAm 52 dB Standby: No noise* ² (Reference) No noise means that the emission sound pressure level of each bystander position is lower than the absolute standard with the background noise of ISO 7779.
FAX SPECIFICATIONS		Standards	
Optional/ standard	Optional on all models	CONSUMABLES	
Maximum Number of Connection Lines	1	Toner Cartridge/s	
Modem Speed	Super G3: 33.6 kbps G3: 14.4 kbps	Toner (Estimated Yield @ 6% Coverage)	
Compression Method	MH, MR, MMR, JBIG	SOFTWARE AND PRINTER MANAGEMENT	
Resolution (dpi)	400 x 400 (ultrafine), 200 x 400 (superfine), 200 x 200 (fine/photo), 200 x 100 (normal)	Tracking and reporting	
Sending/Recording Size	A3, A4, A4R, A5* ¹ , A5R* ¹ , B4, B5* ² , B5R* ¹ * ¹ Sent as A4 * ² Sent as B4	Universal Login Manager (ULM): Manage your costs easily by using the embedded reporting capability to identify and control costs on a user-based level by device. uniFLOW Online Express*: Combining with ULM you can gain further control and highlight expenditures per users/department and pinpoint where costs can be scaled down from a central cloud based location. *Installation, activation and registration required	
FAX memory	Up to 30,000 pages	C-EXV 59 Toner Black	
Speed dials	Max. 200	Black: 30,000 impressions (A4)	
Group dials/destinations	Max. 199 dials		
Sequential broadcast	Max. 256 addresses		
Memory backup	Yes		
Fax Features	Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density (for Scanning), Sharpness, Erase Frame, Job Build, Sender's Name (TTI), Direct Send, Delayed Send, Preview, Finished Stamp, Job Done Notice, TX Report		
STORE SPECIFICATION			
Memory Media	Standard: USB Memory		
SECURITY SPECIFICATIONS			
Authentication	Standard: Universal Login Manager (Device and Function Level Log-in), uniFLOW Online Express*, User Authentication, Department ID Authentication, Access Management System Optional: My Print Anywhere secure print (Requires uniFLOW), Picture Login *No charge for this solution; however activation is required.		

TECHNICAL SPECIFICATIONS

imageRUNNER 2600 Series

Remote management tools	iW Management Console: Server-based software for centralised management of a fleet of devices (includes monitoring or consumables, status monitoring and alerts, distribution of address books, configuration settings, firmware applications, meter capture and reporting, driver and resource management) eMaintenance: Compatible with eMaintenance services via embedded RDS (Enables meter capture, automatic consumables management, remote diagnostics and reporting for service providers to offer efficient, fast and proactive maintenance) Content Delivery System: Allows the Remote distribution of firmware, iR options; Remote User Interface (RUI) Web based interface to each device that helps to provide remote device management and control	SECURITY OPTIONS	
		DATA SECURITY	Picture Login-A1
		SYSTEM AND CONTROLLER OPTIONS	
		PRINT ACCESSORIES	PCL INTERNATIONAL FONT SET-A1 - Adds PCL support for Andalé Mono WT J/K/S/T (Japanese/Korean/Simplified Chinese/Traditional Chinese).
			PS PRINTER KIT-BT1- Provides networked printing support for Adobe PostScript 3 printing.
		BARCODE PRINTING	BARCODE PRINTING KIT-D1 - Provides the ability to print 1D and 2D barcodes on output using jet caps technology.
		SYSTEM ACCESSORIES	COPY CONTROL INTERFACE KIT-D1: Allows connection (CCVI I/F) between 3rd party copy control terminal and Canon's iR-ADV range for cost recovery use.
Scanning software	Network ScanGear: TWAIN-compliant scanner driver that enables computers on a network to use the pull scan functionality of the device	FAX ACCESSORIES	SUPER G3 FAX BOARD-AV2
			REMOTE FAX KIT-A1 - Enables the device to send and receive fax from another device connected with a fax board.
PAPER SUPPLY OPTIONS		OTHER OPTIONS	
CASSETTE FEEDING UNIT-ANI	Paper Capacity: 550 sheets x 2 (80 gsm) Paper Type: Thin, Plain, Thick, Colour, Recycled, Pre-punched Paper Size: A3, A4, A4R, A5R, B4, B5, B5R, Custom size: 139.7 x 182.0 mm to 297.0 x 431.8 mm Paper Weight: 60 to 128 gsm Power Source: From the Main Unit Dimensions (W x D x H): 565 x 650 x 248 mm (attached to the main unit) Weight: Approx. 23.5 kg	ACCESSIBILITY ACCESSORIES	ADF ACCESS HANDLE-A1 - Attaches to the document feeder, making access easier for seated users.
ENVELOPE FEEDER ATTACHMENT-D1	Attaches to the 2nd paper drawer for easy envelope feeding. Holds up to 50 envelopes.	STAPLE CARTRIDGE	STAPLE-P1 - For stapling (2 x 5,000 pcs)
OUTPUT OPTIONS			
INNER 2WAY TRAY-L1	Allows the separation of copies, prints and faxes. Adds a second internal output tray to give a combined output capacity of 350 sheets (upper tray 100 sheets/lower tray 250 sheets).		
INNER FINISHER-J1 (Internal)	Number of Trays: 2 Upper Tray Capacity*: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R: 45 sheets Lower Tray Capacity*: A4, A5, A5R, B5: 500 sheets, A3, A4R, B4, B5R: 250sheets, A6R: 30 sheets *with 81.4 gsm paper Paper Weight: 52 to 220 gsm Staple Position: Corner, Double Staple Capacity: Corner and Double Stapling: A4/B5: 50 sheets (52 to 90 gsm) A3/A4R/B4: 30 sheets (52 to 90 gsm) Eco Staple: A3/A4/B4/B5: 5 sheets (52 to 64 gsm) 4 sheets (65 to 81.4 gsm) 3 sheets (81.5 to 105 gsm) Staple On Demand: 40 sheets (80 gsm) Dimensions (W x D x H): 604 x 535 x 205 mm (when the extension tray is extended) Weight: Approx. 7.3 kg		
HARDWARE ACCESSORIES			
CARD READERS	COPY CARD READER-F1 - Magnetic physical card access system. (Integrates with Department ID, not for use with uniFLOW) IC Card Reader Box-C2 COPY CARD READER ATTACHMENT-H3 - Attachment kit for Copy Card Reader-F1 only.		
OTHERS	CASSETTE LOCK TYPE-F1 - Security accessory which protects the cassette trays from being opened (Available in selected markets only) PLATEN COVER TYPE Z DADF-AZ1		

imageRUNNER 2600 Series

PRODUCT DETAILS:

PRODUCT NAME	MERCURY CODE	EAN CODE
imageRUNNER 2645i MFP	3811C004AA	4549292151077
imageRUNNER 2630i MFP	3809C004AA	4549292150995
imageRUNNER 2625i MFP	3808C004AA	4549292150926

OPTIONAL ACCESSORIES:

PRODUCT NAME	MERCURY CODE	EAN CODE
Document Feeder/Reader Option		
DADF-AZ1	3812C001AA	4549292152173
Platen Cover Type Z	3817C001AA	4549292152197
ADF Access Handle-A1	1095B001AA	4960999354736
Network Option		
PS Printer Kit-BT1@E	3821C001AA	N/A
Barcode Printing Kit-D1@E	3999B005AA	N/A
PCL International Font Set-A1@E	4821B003AA	N/A
Send/FAX		
Super G3 FAX Board-AV2	1633C007AA	4549292152968
Remote Fax Kit-A1@E	3679B005AA	N/A
Universal Send Digital User Signature Kit-C1@E	1326B013AA	N/A
Universal Send Trace & Smooth PDF Kit-A1@E	8581B004AA	N/A
Paper Supply Option		
Cassette Feeding Unit-AN1	1419C002AA	4549292065459
Envelope Feeder Attachment-D1	3665B001AB	4960999650746
Plain Pedestal Type-R2	2290C002AA	8714574655666
Cassette Lock Type-F1	3250V814	8714574659220
Output Option		
Inner Finisher-J1	1423C002AA	4549292065534
Inner 2Way Tray-L1	1422C001AA	4549292065510
Staple-P1	1008B001AB	4960999351100

imageRUNNER 2600 Series

OPTIONAL ACCESSORIES:

PRODUCT NAME	MERCURY CODE	EAN CODE
Other Option		
IC Card Reader Box-C2	0625C002AA	4549292152234
Copy Card Reader Attachment-H3	9897B003AA	4549292152944
Copy Card Reader-F1	4784B001AA	4960999679686
Copy Control Interface Kit-D1	1640C001AA	4549292088281
Heater Kit-N2	1710C004AA	4549292152166
Cassette Heater Unit-37	3666B001BA	4960999654362
DCS- Device Centric Software		
MiCard PLUS for ULM	8418B001AA	8714574592169
UFMifare10CardPack	8418B002AA	8714574592176
UFHID10 CardPack	8418B003AA	8714574592183
Consumables		
C-EXV 59 Toner Black	3760C002AA	4549292145793

Software & Solutions



Compatibility



Canon Inc.
canon.com

Canon Europe
canon-europe.com

English edition
© Canon Europa N.V., 2019