



Canon imageRUNNER C3125i

# HIGH QUALITY COLOUR A3 MULTIFUNCTION PRINTER DELIVERING VALUE, EFFICIENCY AND EASE OF USE

Versatile end-to-end document workflow solution for all your business needs



**PRODUCTIVITY**



**SECURITY**



**CONTROL AND MAINTENANCE**



**USER EXPERIENCE**



**CONNECTIVITY**

**Canon**

---

# Canon imageRUNNER C3125i

## PRODUCTIVITY

- Optimised to speed-up a wide range of print, copy, scan and send document workflows
- User defined display configuration further enhances document processing efficiency
- Capable of high-volume, continuous prints in a variety of paper media
- Optional integrated inner sorter and finisher for paper sorting, eco stapling and manual stapling needs

## USER EXPERIENCE

- Easy customisation of device display for streamlining every-day, repetitive tasks
- Advanced one-touch personalisation options, tailored to individual user needs
- Quick recovery from sleep mode allows for fast job turnaround time
- Opportunity to add messages and images as stand-by slides on the screen display
- Small footprint, fits easily within any office environment

## SECURITY

- Featuring choice of device and cloud-based authentication options to reduce information leaks
- Multiple network security features preventing unauthorised firmware and applications modification
- Can be configured to conform to internally defined security policy
- Data privacy protection and data validation by PDF Encryption and added Digital Device Signature

## CONNECTIVITY

- Smooth and simple linking through Wi-Fi, QR code or optional NFC enables various connection options
- Apple AirPrint and Mopria support allows for wireless printing from mobile devices without the need for printer driver
- Google Cloud support for printing via the Internet from anywhere, regardless of the operating system or device

- Canon's PRINT Business app adds further functions to printing and scanning from mobile devices

## CONTROL AND MAINTENANCE

- e-Maintenance can improve uptime through remote diagnostics, automated meter readings and consumables monitoring
- Reduce administrative burden and associated operational costs
- Minimise waste by applying default print policies, such as double-sided printing, by department or individual user
- Compatibility with Canon's uniFLOW software solutions allows for tracking and reporting of print jobs

## QUICK FACTS

### imageRUNNER C3125i

- Print, Copy, Scan, Send and optional Fax
- 5-inch/12.7cm WVGA colour touchscreen
- Canon Application Library
- Print Speed: 25ppm (A4)
- Print resolution: 1,200 x 1,200 dpi
- Automatic double-sided printing
- DADF standard
- Scan speed: 55ipm (A4, Mono/CL)
- Network, Wi-Fi, USB, QR code and optional NFC connectivity
- Encrypted PDF & Digital Device Signature PDF
- Max paper input capacity: 2,300 sheets

## SERVICES

### CORE

Perform routine office operations safely and with ease, utilising embedded software including uniFLOW Online Express and other available services offering complete device maintenance and support



HARDWARE



SOFTWARE



SERVICES

### BESPOKE

Choose a tailored service to suit your business needs by removing unnecessary print management burdens. Consult with Canon experts about your specific requirements to find a fitting Print Managed Services option

### ENHANCED

Expand cloud capabilities with uniFLOW Online, Canon's all-in-one print management system

Canon Inc.  
canon.com


Canon Europe  
canon-europe.com

English edition  
© Canon Europa N.V., 2019

# Canon imageRUNNER C3125i

## HIGH QUALITY COLOUR A3 MULTIFUNCTION PRINTER DELIVERING VALUE, EFFICIENCY AND EASE OF USE

### MAIN CONFIGURATION OPTIONS

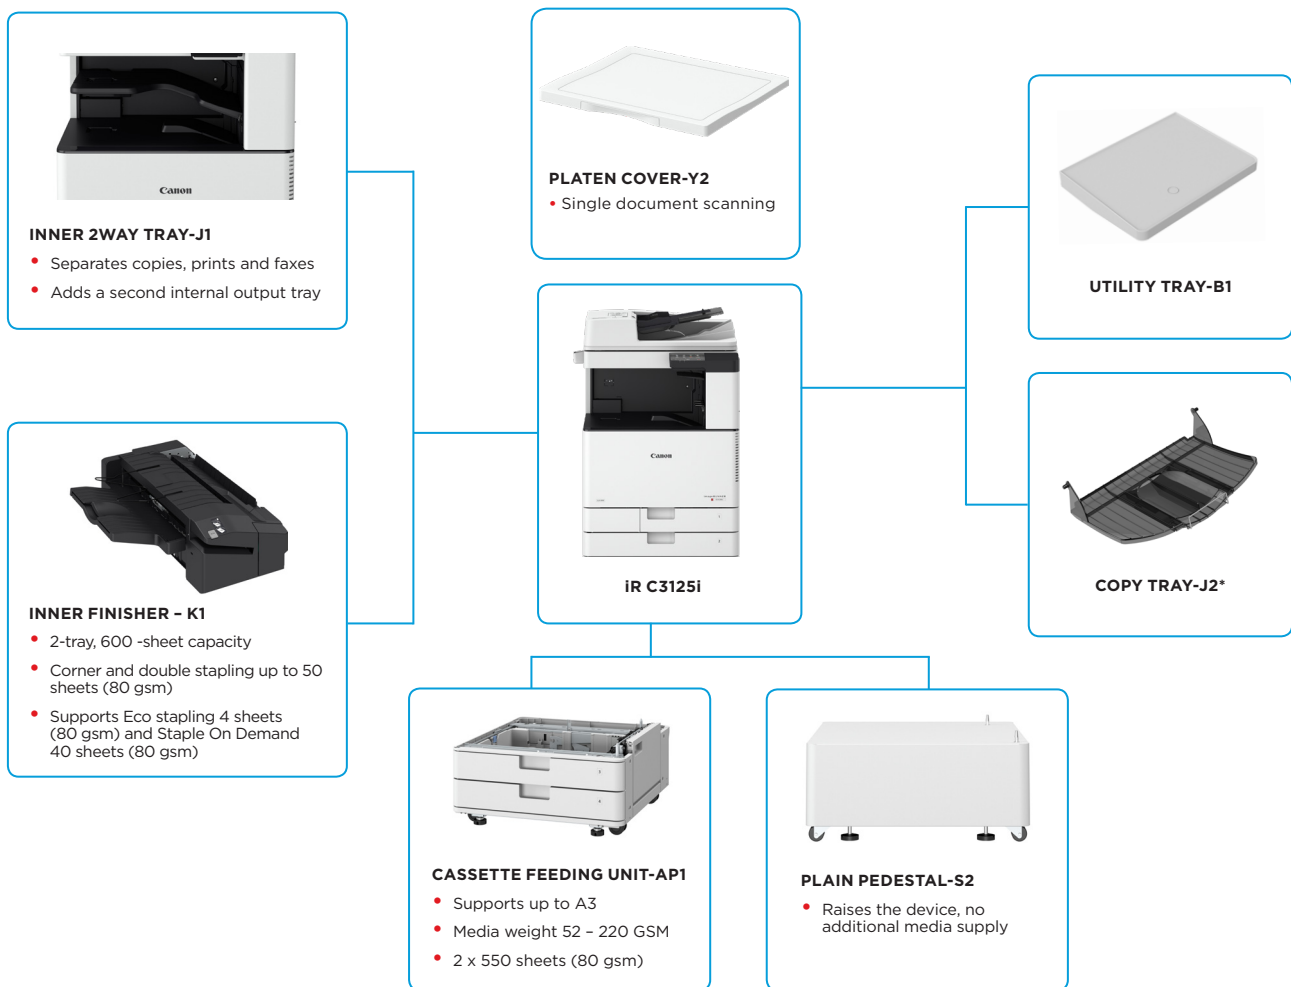

This flat configuration is for illustration purpose only. For a complete list of options and the exact compatibility, please refer to the Online Product Configurator or consult your sales representative.

\*Copy Tray-J2 requires 3 Way Unit-D1

**Canon**

# TECHNICAL SPECIFICATIONS

# Canon imageRUNNER C3125i

## MAIN UNIT

Machine type	A3 Colour Laser Multifunctional
Core functions	Print, Copy, Scan, Send and Optional Fax
Processor	Canon Dual Custom Processor (Shared)
Control Panel	12.7 cm (5 inch) TFT LCD WVGA Colour Touch panel
Memory	Standard: 2.0GB RAM
Interface Connection	NETWORK Standard: 1000BaseT/100Base-TX/10Base-T, Wireless LAN (IEEE802.11b/g/n) Optional: NFC OTHERS Standard: USB 2.0 (Host) x 2, USB 2.0 (Device) x 1 Optional: Copy Control Interface

Paper Supply capacity (A4, 80gsm)	Standard: 1,200 Sheets 100-sheets Multi-purpose tray x 1, 550-sheets Paper cassette x 2 Maximum: 2,300 Sheets (with optional Cassette Feeding Unit-API)
-----------------------------------	---

Paper output capacity (A4, 80gsm)	Standard: 250 Sheets Maximum: 700 Sheets (with Inner Finisher-K1 and Copy Tray-J2)
-----------------------------------	---

Finishing capabilities	Standard model: Collate, Group Finisher model (Inner Finisher-K1): Collate, Group, Offset, Staple, Eco Staple, Staple On Demand
------------------------	--

Supported Media Types	Multi-purpose Tray: Thin, Plain, Heavy*, Recycled, Coated*, Colour, Tracing, Bond, Transparency, Label, Pre-punched, Envelope * SRA3 is unsupported for Coated (257-300gsm) and Heavy (257-300gsm) paper. Paper Cassette (Upper/Lower Cassette): Thin, Plain, Heavy, Recycled, Colour, Bond, Transparency, Pre-punched, Envelope* *Lower Cassette: Envelope Feeder Attachment A is required.
-----------------------	---

Supported media sizes	Multi-purpose tray: Standard size: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, Envelope [COMIO No.10, Monarch, ISO-C5, DL] Custom size: 98.4 x 139.7 mm to 320.0 x 457.2 mm Paper Cassette (Upper Cassette): Standard size: A4, A5, A5R, A6R, B5 Custom size: 105.0 x 148.0 mm up to 297.0 x 215.9 mm Envelope: ISO-C5 Paper Cassette (Lower Cassette): Standard size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom size: 105.0 x 148.0 mm up to 304.8 x 457.2 mm Envelope: [COMIO No.10, Monarch, DL]* *Envelope Feeder Attachment A is required.
-----------------------	--

Supported media weights	Multi-purpose tray: 52 to 300 gsm* * SRA3 is unsupported for Coated (257-300gsm) and Heavy (257-300gsm) paper. Paper Cassette (Upper/Lower Cassette): 52 to 220 gsm Duplex: 52 to 220 gsm
-------------------------	---

Warm-Up Time	From Sleep Mode: 10 Seconds or Less From Power On: 19 Seconds or Less* *Time from device power-on, until copy ready (not print reservation)
--------------	---

Dimensions (W x D x H)	565 x 664 x 880 mm
Installation Space (W x D)	1241 x 1217 mm *with Cassette open + 100 mm gap around the main body

Weight	Approx. 67.3 kg without toner
--------	-------------------------------

## PRINT SPECIFICATIONS

Print Speed (BW/CL)	Up to 25/25 ppm (A4, A5, A5R, A6R), Up to 15/15 ppm (A3), Up to 20/20 ppm (A4R)
---------------------	---

Print Resolution (dpi)	600 x 600, 1,200 x 1,200
------------------------	--------------------------

Page description languages	Standard: UFR II, PCL6 Optional: Adobe®PostScript®3™
----------------------------	---

Direct Print	Supported file types: PDF, EPS, TIFF/JPEG, XPS* *XPS is supported from LPR command print only.
--------------	---

## Printing from mobile and cloud

AirPrint, Mopria, Google Cloud Print, Canon Business Print and uniFLOW Online  
A range of software solutions is available to provide printing from mobile devices and cloud-based services depending on your requirements. Please contact your sales representative for further information.

Fonts	PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Barcode fonts*, PS fonts: 136 Roman * Barcode Printing Kit-D1 is required
-------	---

Print Features	Secure Print, Header/Footer, Page Layout, Two-sided Printing, Mixed Paper Sizes/Orientations, Toner Reduction, Poster Printing, Print Date
----------------	--

Operating System	UFR II: Windows®7/8.1/10/Server2008/Server2008 R2/Server2012/Server2012 R2/Server2016/Server2019, Mac OS X (10.10 or later)
------------------	---

Operating System	PCL: Windows®7/8.1/10/Server2008/Server2008 R2/Server2012/Server2012 R2/Server2016/Server2019
------------------	---

Operating System	PS: Windows®7/8.1/10/Server2008/Server2008 R2/Server2012/Server2012 R2/Server2016/Server2019, Mac OS X (10.10 or later)
------------------	---

Operating System	PPD: Windows®7/8.1/10, MAC OS X (10.9 or later) Please refer to <a href="http://www.canon-europe.com/support/businessproduct-support">http://www.canon-europe.com/support/businessproduct-support</a> for availability of print solutions for other operating systems and environments including AS/400, UNIX, Linux and Citrix. Some of these solutions are chargeable. As of November 2019.
------------------	--

## COPY SPECIFICATIONS

Copy Speed (BW/CL)	Up to 25/25 ppm (A4, A5, A5R, A6R), Up to 15/15 ppm (A3), Up to 20/20 ppm (A4R)
--------------------	---

Copy Speed (BW/CL)	Approx. 5.9/8.2 seconds or less
--------------------	---------------------------------

Copy resolution (dpi)	600 x 600
-----------------------	-----------

Multiple Copies	Up to 999 copies
-----------------	------------------

Copy Density	Automatic or Manual (9 Levels)
--------------	--------------------------------

Magnification	Variable zoom: 25% - 400% (1% Increments) Preset reduction/enlargement: 25%, 50%, 70%, 100% (1:1) / 141%, 200%, 400%
---------------	---

Copy Features	Preset R/E Ratios by Area, Two-Sided, Density Adjustment, Original Type Selection, Book to Two Pages, Two-sided Original, Sort, N on 1, Different Size Originals, Sharpness, Erase Frame, Copy ID Card, Copy Passport, Colour Mode
---------------	--

## SCAN SPECIFICATIONS

Type	Standard: Duplexing Automatic Document Feeder [2-sided to 2-sided (Automatic with DADF)] Optional: Colour Platen (Platen Cover-Y2)
------	---

Type	100 Sheets
------	------------

Document Feeder Paper Capacity (80 gsm)	Platen: Sheet, Book, and 3-Dimensional objects
---	--

Acceptable Originals and weights	Document Feeder media weight: 1-sided scanning: 38 to 128 gsm (BW), 64 to 128 gsm (CL) 2-sided scanning: 50 to 128 gsm (BW), 64 to 128 gsm (CL)
----------------------------------	---

Supported media sizes	Platen: max. scanning size: 297.0 x 431.8 mm
-----------------------	--

Supported media sizes	Document Feeder media size: A3, A4, A4R, A5, A5R, B4, B5, B5R, B6 Custom size: 128.0 x 139.7 mm to 297.0 x 431.8 mm
-----------------------	---

Scan Speed (ipm: BW/CL; A4)	1-sided Scanning: 55/55 (300 x 300 dpi, send), 30/30 (600 x 600 dpi, copy),
-----------------------------	---

Scan Speed (ipm: BW/CL; A4)	2-sided Scanning: 27.5/27.5 (300 x 300 dpi, send), 15/15 (600 x 600 dpi, copy)
-----------------------------	--

Scan Resolution (dpi)	Scan for Copy: up to 600 x 600 Scan for Send: (Push) up to 600 x 600, (Pull) up to 600 x 600 Scan for Fax: up to 600 x 600
-----------------------	--





# TECHNICAL SPECIFICATIONS

# Canon imageRUNNER C3125i

<b>Pull Scan Specifications</b>	ScanGear MF. For both TWAIN and WIA Supported OS: Windows® 7/8.1/10	<b>ENVIRONMENTAL SPECIFICATIONS</b>	
<b>Scan Method</b>	Push Scan, Pull Scan, Scan to Network, Scan to memory media (USB Memory Key), Scan to cloud-based services (uniFLOW)	<b>Operating Environment</b>	Temperature: 10 to 30 °C Humidity: 20 to 80% RH (Relative Humidity) 220-240V 50/60Hz 10A
<b>SEND SPECIFICATIONS</b>		<b>Power source</b>	Maximum: Approx. 1.5 kW or Less Average: Approx. 431.0 W (while printing/copying) Standby: Approx. 34.3 W* <sup>1</sup> Sleep mode: Approx. 2W* <sup>2</sup> , Approx. 1W* <sup>3</sup>
<b>Destination</b>	Standard: E-mail/Internet FAX (SMTP), SMB, FTP Optional: Super G3 FAX	<b>Power consumption</b>	* <sup>1</sup> Reference value: measured one unit * <sup>2</sup> Wireless LAN power serve mode OFF * <sup>3</sup> Wireless LAN power serve mode ON * <sup>2</sup> , * <sup>3</sup> Sleep mode is not available in all circumstances due to certain settings.
<b>Address Book</b>	LDAP (50)/Local (300)/Speed dial (281)	<b>Noise levels (BW/CL)</b>	Typical Electricity Consumption (TEC): 0.29 kWh* * As per US ENERGY STAR Version 3.0
<b>Send resolution (dpi)</b>	Push: 300 x 300 (Email/SMB/FTP), 192 x 204 (IFAX) Pull: 50 x 50, 75 x 75, 150 x 150, 200 x 200, 300 x 300, 400 x 400, 600 x 600		<b>Sound Power Level (LWA,m)</b> (1-sided/2-sided) Active (BW): 6.1/6.4 B* <sup>1</sup> , Kv 0.3/0.3 B* <sup>1</sup> Active (CL): 6.2/6.4 B* <sup>1</sup> , Kv 0.3/0.3 B* <sup>1</sup> <b>Sound Pressure (LpAm)</b> Bystander's position: (1-sided/2-sided) Active (BW): 47/50 dB* <sup>1</sup> , Active (CL): 48/50 dB* <sup>1</sup> , Standby: No noise* <sup>2</sup>
<b>Communication protocol</b>	FTP (TCP/IP), SMB (TCP/IP), SMTP		* <sup>1</sup> Reference value: measured only one unit with ISO7779, described with ISO9296:2017 * <sup>2</sup> No noise means that the emission sound pressure level of each bystander position is lower than the absolute standard with the background noise of ISO 7779.
<b>File Format</b>	Standard: TIFF, JPEG*, PDF (Compact, Searchable, Encrypted, Digital Signature) *Single Page Only	<b>Standards</b>	Blue Angel
<b>Universal Send Features</b>	Original Type Selection, Two-sided Original, Different-size Originals, Density Adjustment, Sharpness, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation	<b>CONSUMABLES</b>	
<b>FAX SPECIFICATIONS</b>		<b>Toner Cartridge/s</b>	C-EXV 54 TONER BK/C/M/Y
<b>Maximum Number of Connection Lines</b>	1	<b>Toner (Estimated Yield @ 5% Coverage)</b>	C-EXV 54 TONER BK: 15,500 pages C-EXV 54 TONER C/M/Y: 8,500 pages
<b>Modem Speed</b>	Super G3: 33.6 kbps G3: 14.4 kbps	<b>SOFTWARE AND PRINTER MANAGEMENT</b>	
<b>Compression Method</b>	MH, MR, MMR, JBIG	<b>Tracking and reporting</b>	<b>Universal Login Manager (ULM):</b> Manage your costs easily by using the embedded reporting capability to identify and control costs on a user-based level by device. uniFLOW Online Express*: Combining with ULM you can gain further control and highlight expenditures per users/department and pinpoint where costs can be scaled down from a central cloud based location. *Installation, activation and registration required
<b>Resolution (dpi)</b>	400 x 400 (Ultra Fine), 200 x 400 (Super Fine), 200 x 200 (Fine/Photo), 200 x 100 (Normal)		<b>iW Management Console:</b> Server-based software for centralised management of a fleet of devices (includes monitoring or consumables, status monitoring and alerts, distribution of address books, configuration settings, firmware and MEAP applications, meter capture and reporting, driver and resource management) <b>eMaintenance:</b> Compatible with eMaintenance services via embedded RDS (Enables meter capture, automatic consumables management, remote diagnostics and reporting for service providers to offer efficient, fast and proactive maintenance) <b>Content Delivery System:</b> Allows the Remote distribution of firmware, iR options and MEAP applications; Remote User Interface (RUI) Web based interface to each device that helps to provide remote device management and control
<b>Sending/Receiving Size</b>	Sending: A3, A4, A4R, A5* <sup>2</sup> , A5R* <sup>2</sup> , B4, B5* <sup>1</sup> , B5R* <sup>2</sup> Receiving: A3, A4, A4R, A5R, B4, B5, B5R * <sup>1</sup> Sent as B4 * <sup>2</sup> Sent as A4	<b>Remote management tools</b>	Application Library
<b>FAX memory</b>	Up to 512 pages		ScanGear MF Scanner Driver
<b>Speed dials</b>	Max. 281		Canon Driver Configuration Tool
<b>Group dials/destinations</b>	Max. 299 dials		
<b>Sequential broadcast</b>	Max. 310 addresses		
<b>Memory backup</b>	Yes		
<b>Fax Features</b>	Direct Send, TX Report, Sequential Broadcasting		
<b>SECURITY SPECIFICATIONS</b>			
<b>Authentication and Access Control</b>	Standard: Department ID Authentication (Department ID and PIN Login, Function Level Login), uniFLOW Online Express (PIN Login, Card Login, Card and PIN Login)		
<b>Document Security</b>	Print Security (Secure Print, uniFLOW Secure Print*), Scan Security (Encrypted PDF, Device Signature PDF), Send Data Security (Restricted E-mail/File send functions, Confirming FAX number, Allow/Restrict Fax Driver Transmissions, Allow/Restrict Sending from History) *Requires uniFLOW Online / uniFLOW		
<b>Network Security</b>	IPSec, IEEE802.1X authentication, SNMPv3, Firewall Functionality (IP/MAC Address Filtering), Enabling/Disabling Remote UI, G3 FAX separation from LAN, USB Port separation from LAN		
<b>Device Security</b>	Standard: Storage Initialize, Job Log Conceal Function, Protecting MFD Software Integrity		
<b>Device Management and Auditing</b>	Standard: Administrator Password, Digital Certificate and Key Management, Security Policy Setting		
		<b>Customisation options</b>	
		<b>Scanning software</b>	
		<b>Optimisation tools</b>	

# TECHNICAL SPECIFICATIONS

# Canon imageRUNNER C3125i

## PAPER SUPPLY OPTIONS

### Cassette Feeding Unit-AP1

Paper Capacity: 550 sheets x 2 (80 gsm)  
 Paper Type: Thin, Plain, Recycled, Color, Heavy, Bond, Transparency, Pre-punched  
 Paper Size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, Custom Size: 105.0 x 148 mm to 304.8 x 457.2 mm  
 Paper Weight: 52 to 220 gsm  
 Power Supply: From the Main Unit  
 Dimensions (W x D x H): 565 x 615 x 248 mm  
 Weight: Approx. 16 kg

## OUTPUT OPTIONS

### Inner Finisher-K1

Tray Capacity (with 80gsm paper):  
 Number of Trays: 2  
 Lower Tray1: A4, A5, A5R, B5: up to 500 sheets  
     SRA3, A3, A4R, B4, B5R: up to 250 sheets  
     A6R: up to 30 sheets  
 Upper Tray2: A4, A5, A5R, B5: up to 100 sheets  
     SRA3, A3, A4R, A6R, B4, B5R: up to 50 sheets  
 Paper Weight:  
 Lower Tray1: 52 to 256 gsm  
 Upper Tray2: 52 to 300 gsm  
 Staple Position: Corner, Double  
 Staple Capacity:  
 A4/B5: 50 sheets (52 to 90 gsm)  
 A3/B4/A4R: 30 sheets (52 to 90 gsm)  
 Eco Staple:  
 A3/A4/B4/B5: 5 sheets (52 to 64 gsm)  
                   4 sheets (65 to 81.4 gsm)  
                   3 sheets (82 to 105 gsm)  
 Staple On Demand: approx 40 sheets (80 gsm)  
 Power Supply: From the main unit  
 Dimensions (W x D x H): 634 mm x 525 mm x 188 mm (when the extension tray and rotary tray are extended)  
 Weight: Approx. 8 kg

### Inner 2way Tray-J1

Paper Capacity (with 80 gsm paper)  
 -Upper tray:  
     SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, Custom size (98.4 x 139.7 mm to 320.0 x 457.2 mm): 100 sheets  
 -Lower tray:  
     A4, A5, A5R, A6R, B5, B5R: up to 250 sheets  
     SRA3, A3, A4R, B4, Custom Size (98.4x139.7 to 320.0x457.2 mm ): up to 100 sheets  
 Paper Weight: 52 to 300 gsm  
 Dimensions (W x D x H): 426 x 407 x 76 mm  
 Weight: 0.7 kg  
 \*Requires 3 Way Unit-D1

### Copy Tray-J2

Capacity: 100 sheets (80 gsm)\* A4, B5, B5R, A5R  
 Dimensions (W x D x H): 444 x 373 x 176 mm (attached to the main unit, when the extension tray is extended)  
 Weight: Approx. 0.5 kg  
 \*Requires 3 Way Unit-D1

## HARDWARE ACCESSORIES

### card readers

IC Card Reader Attachment-B2  
 COPY CARD READER-F1  
 COPY CARD READER ATTACHMENT-H3  
 UTILITY TRAY-B1  
 3 Way Unit-D1

### others

## SYSTEM AND CONTROLLER OPTIONS

### print accessories

### barcode printing

### system accessories

PS Printer Kit-BK1  
 BARCODE PRINTING KIT-D1  
 COPY CONTROL INTERFACE KIT-D1  
 NFC KIT-D1  
 SUPER G3 FAX BOARD-AV3

### fax accessories

## OTHER OPTIONS

### accessibility accessories

### staple cartridge

ADF ACCESS HANDLE-A1  
 Platen Cover-Y2  
 STAPLE-P1

## Software & Solutions



## Compatibility



# Canon imageRUNNER C3125i

## PRODUCT DETAILS:

PRODUCT NAME	MERCURY CODE	EAN CODE
imageRUNNER C3125i MFP	3653C005AA	4549292159998

## OPTIONAL ACCESSORIES:

PRODUCT NAME	MERCURY CODE	EAN CODE
<b>Document Feeder/Reader Option</b>		
Platen Cover-Y2	3818C002AA	4549292161861
ADF Access Handle-A1	1095B001AA	4960999354736
<b>Network Option</b>		
PS Printer Kit-BK1@E	1635C005AA	N/A
Barcode Printing Kit-D1@E	3999B005AA	N/A
NFC Kit-D1	1617C001AA	4549292087970
<b>Send/FAX</b>		
Super G3 FAX Board-AV3	1633C011AA	4549292160079
<b>Paper Supply Option</b>		
Cassette Feeding Unit-AP1	1537C002AA	4549292079562
<b>Output Option</b>		
Inner Finisher-K1	1553C001AA	4549292079739
Inner 2way Tray-J1	9611B001AA	4549292031867
Copy Tray-J2	8815A003AA	4549292031577
3 Way Unit-D1	8952B001AA	4549292031898
Staple-P1	1008B001AB	4960999351100
<b>DCS- Device Centric Software</b>		
IC Card Reader Attachment-B2	1708C002AA	4549292160123
Copy Card Reader-F1	4784B001AA	4960999679686
Copy Card Reader Attachment-H3	9897B003AA	4549292152944

# Canon imageRUNNER C3125i

## OPTIONAL ACCESSORIES:

PRODUCT NAME	MERCURY CODE	EAN CODE
<b>Other Option</b>		
Plain Pedestal Type-S2	2291C002AA	8714574655666
Copy Control Interface Kit-D1	1640C001AA	4549292088281
Cassette Heater Unit-41	8955B001BB	4549292032192
Utility Tray-B1	0165C001AA	4549292026870
Media Adjustment kit-A1	1148C001AA	4549292059779
<b>Consumables</b>		
C-EXV 54 Toner Black	1394C002AA	4549292080452
C-EXV 54 Toner Cyan	1395C002AA	4549292080445
C-EXV 54 Toner Magenta	1396C002AA	4549292080438
C-EXV 54 Toner Yellow	1397C002AA	4549292080421



Canon Inc.  
canon.com  
Canon Europe  
canon-europe.com  
English edition  
© Canon Europa N.V., 2019