

Document Solutions

> PRINT> COPY > SCAN > FAX

ECOSYS M6630cidn (4-in-1) ECOSYS M6635cidn (4-in-1)

COLOR MULTIFUNCTION PRODUCT FOR A₄ FORMAT





These new A4 colour devices are designed specifically for medium and large-sized work groups, offering both reliability and fast output speeds in both colour and b/w and now complying with the newest environmental standards. The convenient touch panels provide simple, direct access to the multifunctionals' numerous functions. What's more, dedicated program keys and KYOCERA's open solution platform HyPAS can help further optimize your document workflow. And for your bottom line, it offers you an attractive TCO.

- > Fast A4 copy/print speed up to 35/35 cpm Mono/Color*
- 1,200 x 1,200 dpi printing resolution
- Fast scanning speed up to 62/46 ipm Mono/Color
- > Support A6 duplex scan from Document Processor
- > Fit for high print volume with paper capacity up to 1,850 sheets**
- User friendly 7-inch large color touch screen panel
- Standard 1GB RAM for heavy-duty tasks without additional memory
- Standard 100 sheets capacity with One-path duplex scanning Document Feeder* *For ECOSYS M6635cidn only

 **Main unit + Multi-Purpose Tray + Optional PF5100 x3




Born to be Extraordinary

KYOCERA Document Solutions is Extraordinary for

- Broad Range of Multifunction Devices and Printers
- Optimized Total Cost of Ownership (TCO)
- Reliable with Long Life Drum and Parts
- New and Advanced Technology

KYOCERA Document Solutions strives to be a company that contributes to the society and demonstrates a "Customer First" principle by providing customers with maximum value to increase their satisfaction. By adhering to the mission of producing document management devices that take balance between "Economy" and "Ecology", KYOCERA Document Solutions succeeds to develop document management devices with advanced technologies which help customers to optimize office productivity and efficiency at a low total cost of ownership and, at the same time, improving environmental performance.

Robust Features

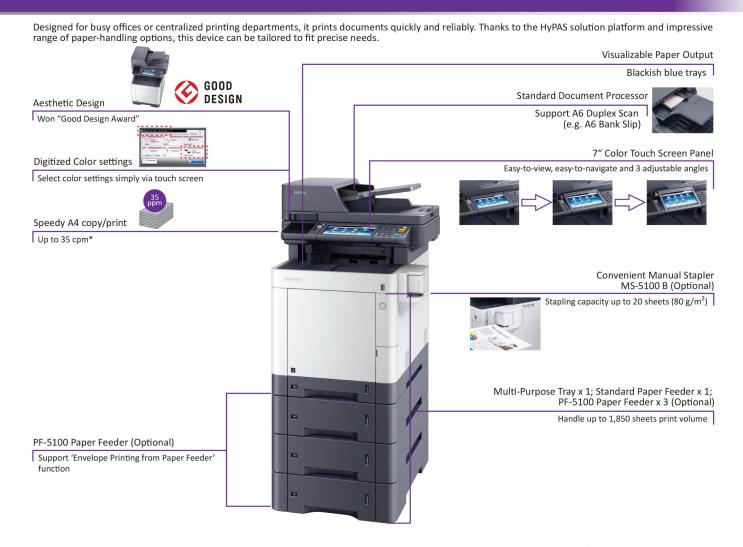

Amazing Quality

COPY/PRINT

• Convenient Multi-Purpose Tray First Mode: Allow printing via Multi-Purpose Tray whenever a paper is loaded there.

· Direct print from USB memory.



• Superior image quality 1,200 x 1,200 dpi print resolution.



SCAN

- Support mixed sizes A4/Letter and Legal original in Copy/Scan.
- Skip Blank Page Function: Automatically skip blank pages in copy and scan.



- Fast scanning up to 62/46* ipm in A4 Mono/Color.
- Store scanned data easily by 'Scan to FTP', 'Scan to SMB', 'Scan to Email' and "Scan to USB".



FAX

- · A destination and other transmission settings can be registered as a favor to prevent sending to the wrong recipient.
- Capable of sending and receiving fax via PC with network fax function.
- Fax broadcast up to 100 different destinations



2-sided copy/print as standar



Equip with special features, e.g. 'Job Finish Notice' and 'Prevent Bleed-Through' Functions, etc.



• Banner Send: Scan a banner/3 or 4 panels folding with ease (One-sided only)





*For ECOSYS M6635cidn only

Standard of Security

· Authentication management among departments via IC Card.



• Standard built-in Kensington Security Slot for burglar-proof of the device.

- Sophisticated network security (SSL, IPsec) as a standard to prevent improper access.
- Private Print enables secure print jobs with preset password request at the device.





Protecting the Earth

· Low energy consumption Energy Star Ver.2.0 certified.

Usage of white LED illumination for lower light emissions and power consumption.

- · Free of Hazardous material
 - Fulfilled the requirements of RoHS (Restriction of Hazardous Substances) & usage of Lead-Free Parts.
- Reduce wastage by Long Life Consumables and Drums.
- Reduce noise by Quiet Mode.

<u>Powertul</u> Customization

By combining the innovative Business Applications, these devices can manage documents in an effective approach. **HyPAS** Enhances specific document imaging needs.

Remote control designated KYOCERA printing devices by smartphone or tablet.

Print documents, photographs, images, etc. directly from iOS devices/Mac.

KYOCERA Mobile Print

Conveniently print files, web pages and images using smartphone or tablet.

• KYOCERA Cloud Connect (Optional)

Print and scan directly to the cloud services easily.

KYOCERA Fleet Services (Optional)

Maintain entire fleet from the cloud.

KYOCERA Net Manager (Optional)

Control sensitive documents and reduce printing costs.

KYOCERA Net Device Manager

Optimize, track and manage network devices from local and remote locations.

- Support WiFi Direct:
- o Require IB-36 Wireless LAN (Optional)
- o Makes print via AirPrint/Google Cloud Print/Mopria/KYOCERA Mobile Print/KYOCERA MyPanel much easier.

















		Main Spe		
Model		ECOSYS M6630cidn	ECOSYS M6635cidn	
Main Function		Copy, Print, Scan, Fax		
Writing Method		Semiconductor Laser		
CPU		ARM Cortex-A9 I	Dual core 1.2GHz	
Print Speed (A4) (Mon	1	30/30 ppm	35/35 ppm	
Scanning Speed (A4)	Simplex	60/40 ipm	60/40 ipm	
300dpi (Mono / Color)	Duplex	26/17 ipm	62/46 ipm	
Memory Warm Up Time		Standard 1G 26 seconds	3 (Max. 3GB) 25 seconds	
Warm Up Time	Standard	250 sheets (Cassette	SC OFFI HAVE A A COLUMN	
Paper Capacity	Maximum	1,850 sheets (Main Unit + 500 sheets PF-5100 x3 + MPT)		
	Cassette	Min. A6R - Max. A4 (Legal)		
Paper Size	Option	Min. ASR - Max. A4 (Legal)		
	MPT	Min. A6R - Max. A4 (Legal)		
	Cassette	60 - 163 g/m ²		
Paper Weight	Option	60 - 220 g/m ²		
-	MPT	60 - 220 g/m²		
Duplex Printing		Paper size: A5R - A4/Legal; Paper weight: 60 - 163 g/m ²		
Output Capacity		Max. 250 sheets face-down		
Control Panel		7 inch Color Touch LCD Panel		
Document Processor		Standard (Max. 75 sheets RADF Type)	Standard (Max. 100 sheets One-path duplex scanning Type)	
Dimension (W x D x H)	(Main Unit)	475mm x 558mm x 616mm	480mm x 577mm x 619.5mm	
Weight (Main Unit)		Approx. 35.4 kg	Approx. 36.5 kg	
Power Consumption	Copy / Print Mode	521W/496W	547W/532W	
Consumption (Standard	Stand-by Mode	70W	84W	
configuration)	Energy Saver	0.6W		
Noise (ISO7779 /	Copy / Print Mode	49.5dB(A)	52dB(A)	
ISO9296) Safoty Standards: GS/I	Stand-by Mode	30d This unit is manufactured according to ISO 9001 quality stand	B(A) ard and ISO 14001 environmental standard. RoHs compatibility	
Safety Standards: GS/1	UV/CE	Copy Fu		
Carro Ciar / Danalostica	/ Maritim In Comm	The Control of the Co		
Copy Size / Resolution First Copy Time (Mond		Max. A4 (Legal) - Min. A6 7.5 sec / 9.0 sec	7.5 sec / 8.5 sec	
	Manual	25% - 400%		
Zoom Ratio	Pre-defined	78		
		Print Functions		
			600 x 600 dpi; 9600 Equivalent x 600 dpi; 1,200 x 1,200 dpi	
Resolution				
			ıt x 600 dpi; 1,200 x 1,200 dpi	
PDL		600 x 600 dpi; 9600 Equivaler	ıt x 600 dpi; 1,200 x 1,200 dpi	
PDL First Print Out Time		600 x 600 dpi; 9600 Equivaler PRESCRIBE, PCL6 (PCL-XL, PCL 5c), KPDL3 (Postso	nt x 600 dpi; 1,200 x 1,200 dpi ript 3 compatible), XPS, PDF Direct Print Ver. 1.7 6.0 sec / 7.5 sec	
PDL First Print Out Time Supported Protocol	ported	600 x 600 dpi; 9600 Equivaler PRESCRIBE, PCL6 (PCL-XL, PCL 5c), KPDL3 (Postsr 6.5 sec / 7.5 sec TCP/IP, NetBEUI, FTP, Port 9100, LPR, IPP, I	nt x 600 dpi; 1,200 x 1,200 dpi ript 3 compatible), XPS, PDF Direct Print Ver. 1.7 6.0 sec / 7.5 sec	
PDL First Print Out Time Supported Protocol Operating System Sup	ported	600 x 600 dpi; 9600 Equivaler PRESCRIBE, PCL6 (PCL-XL, PCL 5c), KPDL3 (Postsr 6.5 sec / 7.5 sec TCP/IP, NetBEUI, FTP, Port 9100, LPR, IPP, I	nt x 600 dpi; 1,200 x 1,200 dpi ript 3 compatible), XPS, PDF Direct Print Ver. 1.7 6.0 sec / 7.5 sec PP over SSL/TLS, WSD Print, Apple Bonjour r 2012, Windows Server 2012 R2; Windows 7, Windows 10; Linux	
PDL First Print Out Time Supported Protocol Operating System Sup Interface USB Memory Printing	/ Format	600 x 600 dpi; 9600 Equivaler PRESCRIBE, PCL6 (PCL-XL, PCL 5c), KPDL3 (Posts) 6.5 sec / 7.5 sec TCP/IP, NetBEUI, FTP, Port 9100, LPR, IPP, I Windows Server 2008, Windows Server 2008 R2, Windows Serve USB 2.0 High Speedx1; Ethernet 10BASE-T/100BAS Standard; TIFF,	t x 600 dpj; 1,200 x 1,200 dpi ript 3 compatible), XPS, PDF Direct Print Ver. 1.7 6.0 sec / 7.5 sec PP over SSL/TLS, WSD Print, Apple Bonjour r 2012, Windows Server 2012 R2; Windows 7, Windows 10; Linux E-TX/1000BASE-T; USB Host Interface (USB Host)x2 JPEG, PDF, XPS	
Resolution PDL First Print Out Time Supported Protocol Operating System Sup Interface USB Memory Printing Mobile / e-mail Printin	/ Format	600 x 600 dpi; 9600 Equivaler PRESCRIBE, PCL6 (PCL-XL, PCL 5c), KPDL3 (Postsr 6.5 sec / 7.5 sec TCP/IP, NetBEUI, FTP, Port 9100, LPR, IPP, I Windows Server 2008, Windows Server 2008 R2, Windows Serve USB 2.0 High Speedx1; Ethernet 10BASE-T/100BAS	t x 600 dpi; 1,200 x 1,200 dpi ript 3 compatible), XPS, PDF Direct Print Ver. 1.7 6.0 sec / 7.5 sec PP over SSL/TLS, WSD Print, Apple Bonjour r 2012, Windows Server 2012 R2; Windows 7, Windows 10; Linux E-TX/1000BASE-T; USB Host Interface (USB Host)x2 JPEG, PDF, XPS	
PDL First Print Out Time Supported Protocol Operating System Supp Interface USB Memory Printing Mobile / e-mail Printin	/ Format	600 x 600 dpi; 9600 Equivaler PRESCRIBE, PCL6 (PCL-XL, PCL 5c), KPDL3 (Posts) 6.5 sec / 7.5 sec TCP/IP, NetBEUI, FTP, Port 9100, LPR, IPP, I Windows Server 2008, Windows Server 2008 R2, Windows Serve USB 2.0 High Speedx1; Ethernet 10BASE-T/100BAS Standard; TIFF, AirPrint, Mopria, KYOCERA Mobile Scan Ft	t x 600 dpj; 1,200 x 1,200 dpi ript 3 compatible), XPS, PDF Direct Print Ver. 1.7 6.0 sec / 7.5 sec PP over SSL/TLS, WSD Print, Apple Bonjour r 2012, Windows Server 2012 R2; Windows 7, Windows 10; Linux E-TX/1000BASE-T; USB Host Interface (USB Host)x2 JPEG, PDF, XPS Print, Google Cloud Print / Standard nctions	
PDL First Print Out Time Supported Protocol Operating System Supp Interface USB Memory Printing, Mobile / e-mail Printin	/ Format	600 x 600 dpi; 9600 Equivaler PRESCRIBE, PCL6 (PCL-XL, PCL 5c), KPDL3 (Posts) 6.5 sec / 7.5 sec TCP/IP, NetBEUI, FTP, Port 9100, LPR, IPP, I Windows Server 2008, Windows Server 2008 R2, Windows Serve USB 2.0 High Speedx1; Ethernet 10BASE-T/100BAS Standard; TIFF, AirPrint, Mopria, KYOCERA Mobile Scan FL ACS; Full Color; Gray	t x 600 dpj; 1,200 x 1,200 dpi ript 3 compatible), XPS, PDF Direct Print Ver. 1.7 6.0 sec / 7.5 sec PP over SSL/TLS, WSD Print, Apple Bonjour r 2012, Windows Server 2012 R2; Windows 7, Windows 10; Linux E-TX/1000BASE-T; USB Host Interface (USB Host)x2 JPEG, PDF, XPS Print, Google Cloud Print / Standard nctions scale; Black & White	
PDL First Print Out Time Supported Protocol Operating System Supl Interface USB Memory Printing Mobile / e-mail Printin Color Selection Resolution	/ Format	600 x 600 dpi; 9600 Equivaler PRESCRIBE, PCL6 (PCL-XL, PCL 5c), KPDL3 (Posts) 6.5 sec / 7.5 sec TCP/IP, NetBEUI, FTP, Port 9100, LPR, IPP, I Windows Server 2008, Windows Server 2008 R2, Windows Server USB 2.0 High Speedx1; Ethernet 10BASE-T/100BAS Standard; TIFF, AirPrint, Mopria, KYOCERA Mobile Scan FL ACS; Full Color; Gray 600dpi, 400dpi, 300dpi, 200	t x 600 dpi; 1,200 x 1,200 dpi ript 3 compatible), XPS, PDF Direct Print Ver. 1.7 6.0 sec / 7.5 sec PP over SSL/TLS, WSD Print, Apple Bonjour r 2012, Windows Server 2012 R2; Windows 7, Windows 10; Linux E-TX/1000BASE-T; USB Host Interface (USB Host)x2 JPEG, PDF, XPS Print, Google Cloud Print / Standard nctions scale; Black & White dpi, 200x400dpi, 200x100dpi	
PDL First Print Out Time Supported Protocol Operating System Sup Interface USB Memory Printing Mobile / e-mail Printin Color Selection Resolution File Format	/ Format	600 x 600 dpi; 9600 Equivaler PRESCRIBE, PCL6 (PCL-XL, PCL 5c), KPDL3 (Posts) 6.5 sec / 7.5 sec TCP/IP, NetBEUI, FTP, Port 9100, LPR, IPP, I Windows Server 2008, Windows Server 2008 R2, Windows Server USB 2.0 High Speedx1; Ethernet 10BASE-T/100BAS Standard; TIFF, AirPrint, Mopria, KYOCERA Mobile Scan FL ACS; Full Color; Gray 600dpi, 400dpi, 300dpi, 200 TIFF, JPEG, XPS, OpenXPS, PDF (MMR/JPEG compression/High-compression PDF),	t x 600 dpj; 1,200 x 1,200 dpi ript 3 compatible), XPS, PDF Direct Print Ver. 1.7 6.0 sec / 7.5 sec PP over SSL/TLS, WSD Print, Apple Bonjour r 2012, Windows Server 2012 R2; Windows 7, Windows 10; Linux E-TX/1000BASE-T; USB Host Interface (USB Host)x2 JPEG, PDF, XPS Print, Google Cloud Print / Standard nctions scale; Black & White dpi, 200x400dpi, 200x100dpi Encrypted PDF, PDF/A-1, PDF/A-2, MS Office file (option), Searchable PDF (option)	
PDL First Print Out Time Supported Protocol Operating System Sup Interface USB Memory Printing Mobile / e-mail Printin Color Selection Resolution File Format Image Type Mode	/ Format	600 x 600 dpi; 9600 Equivaler PRESCRIBE, PCL6 (PCL-XL, PCL Sc), KPDL3 (Postst 6.5 sec / 7.5 sec TCP/IP, NetBEUI, FTP, Port 9100, LPR, IPP, I Windows Server 2008, Windows Server 2008 R2, Windows Server USB 2.0 High Speedx1; Ethernet 10BASE-T/100BAS Standard; TIFF, AirPrint, Mopria, KYOCERA Mobile Scan FU ACS; Full Color; Gray 600dpi, 400dpi, 300dpi, 200 TIFF, JPEG, XPS, OpenXPS, PDF (MMR/JPEG compression/High-compression PDF), Text, Photo, Text + Pho	t x 600 dpi; 1,200 x 1,200 dpi ript 3 compatible), XPS, PDF Direct Print Ver. 1.7 6.0 sec / 7.5 sec PP over SSL/TLS, WSD Print, Apple Bonjour r 2012, Windows Server 2012 R2; Windows 7, Windows 10; Linux E-TX/1000BASE-T; USB Host Interface (USB Host)x2 JPEG, PDF, XPS Print, Google Cloud Print / Standard nctions scale; Black & White dpi, 200x400dpi, 200x100dpi Encrypted PDF, PDF/A-1, PDF/A-2, MS Office file (option), Searchable PDF (option) to, Light Text/Fine Line	
PDL First Print Out Time Supported Protocol Operating System Sup Interface USB Memory Printing Mobile / e-mail Printin Color Selection Resolution File Format Image Type Mode Transmission Type	/ Format	600 x 600 dpi; 9600 Equivaler PRESCRIBE, PCL6 (PCL-XL, PCL Sc), KPDL3 (Postst 6.5 sec / 7.5 sec TCP/IP, NetBEUI, FTP, Port 9100, LPR, IPP, I Windows Server 2008, Windows Server 2008 R2, Windows Server USB 2.0 High Speedx1; Ethernet 10BASE-T/100BAS Standard; TIFF, AirPrint, Mopria, KYOCERA Mobile Scan FU ACS; Full Color; Gray 600dpi, 400dpi, 300dpi, 200 TIFF, JPEG, XPS, OpenXPS, PDF (MMR/JPEG compression/High-compression PDF), Text, Photo, Text + Photoscan to SMB; Scan to E-mail; Scan to FTP or FTP or	t x 600 dpi; 1,200 x 1,200 dpi ript 3 compatible), XPS, PDF Direct Print Ver. 1.7 6.0 sec / 7.5 sec PP over SSL/TLS, WSD Print, Apple Bonjour r 2012, Windows Server 2012 R2; Windows 7, Windows 10; Linux E-TX/1000BASE-T; USB Host Interface (USB Host)x2 JPEG, PDF, XPS Print, Google Cloud Print / Standard nctions scale; Black & White dpi, 200x400dpi, 200x100dpi Encrypted PDF, PDF/A-1, PDF/A-2, MS Office file (option), Searchable PDF (option) to, Light Text/Fine Line ver SSL; Scan to USB; TWAIN Scan; WSD Scan, WIA	
PDL First Print Out Time Supported Protocol Operating System Sup Interface USB Memory Printing Mobile / e-mail Printin Color Selection Resolution File Format Image Type Mode Transmission Type	/ Format	600 x 600 dpi; 9600 Equivaler PRESCRIBE, PCL6 (PCL-XL, PCL Sc), KPDL3 (Posts: 6.5 sec / 7.5 sec TCP/IP, NetBEUI, FTP, Port 9100, LPR, IPP, I Windows Server 2008, Windows Server 2008 R2, Windows Server USB 2.0 High Speedx1; Ethernet 10BASE-T/100BAS Standard; TIFF, AirPrint, Mopria, KYOCERA Mobile Scan FL ACS; Full Color; Gray 600dpi, 400dpi, 300dpi, 200 TIFF, JPEG, XPS, OpenXPS, PDF (MMR/JPEG compression/High-compression PDF), Text, Photo, Text + Photo Scan to SMB; Scan to E-mail; Scan to FTP or FTP or 200 addresses (Common address)	tx 600 dpi; 1,200 x 1,200 dpi ript 3 compatible), XPS, PDF Direct Print Ver. 1.7 6.0 sec / 7.5 sec PP over SSL/TLS, WSD Print, Apple Bonjour r 2012, Windows Server 2012 R2; Windows 7, Windows 10; Linux E-TX/1000BASE-T; USB Host Interface (USB Host)x2 JPEG, PDF, XPS Print, Google Cloud Print / Standard nctions scale; Black & White dpi, 200x400dpi, 200x100dpi Encrypted PDF, PDF/A-1, PDF/A-2, MS Office file (option), Searchable PDF (option) to, Light Text/Fine Line ver SSL; Scan to USB; TWAIN Scan; WSD Scan, WIA	
PDL First Print Out Time Supported Protocol Operating System Sup Interface USB Memory Printing Mobile / e-mail Printin Color Selection Resolution File Format Image Type Mode Transmission Type Address Storage	/ Format	600 x 600 dpi; 9600 Equivaler PRESCRIBE, PCL6 (PCL-XL, PCL Sc), KPDL3 (Posts: 6.5 sec / 7.5 sec TCP/IP, NetBEUI, FTP, Port 9100, LPR, IPP, I Windows Server 2008, Windows Server 2008 R2, Windows Server USB 2.0 High Speedx1; Ethernet 10BASE-T/100BAS Standard; TIFF, AirPrint, Mopria, KYOCERA Mobile Scan FL ACS; Full Color; Gray 600dpi, 400dpi, 300dpi, 200 TIFF, JPEG, XPS, OpenXPS, PDF (MMR/JPEG compression/High-compression PDF), Text, Photo, Text + Photo Scan to SMB; Scan to E-mail; Scan to FTP or FTP o 200 addresses (Common address)	tx 600 dpi; 1,200 x 1,200 dpi ript 3 compatible), XPS, PDF Direct Print Ver. 1.7 6.0 sec / 7.5 sec PP over SSL/TLS, WSD Print, Apple Bonjour r 2012, Windows Server 2012 R2; Windows 7, Windows 10; Linux E-TX/1000BASE-T; USB Host Interface (USB Host)x2 JPEG, PDF, XPS Print, Google Cloud Print / Standard nctions scale; Black & White dpi, 200x400dpi, 200x100dpi Encrypted PDF, PDF/A-1, PDF/A-2, MS Office file (option), Searchable PDF (option) to, Light Text/Fine Line ver SSL; Scan to USB; TWAIN Scan; WSD Scan, WIA sist), 50 groups (Group address list) nctions	
PDL First Print Out Time Supported Protocol Operating System Sup Interface USB Memory Printing Mobile / e-mail Printin Color Selection Resolution File Format Image Type Mode Transmission Type Address Storage Original Size	/ Format g	600 x 600 dpi; 9600 Equivaler PRESCRIBE, PCL6 (PCL-XL, PCL 5c), KPDL3 (Posts: 6.5 sec / 7.5 sec TCP/IP, NetBEUI, FTP, Port 9100, LPR, IPP, I Windows Server 2008, Windows Server 2008 R2, Windows Server USB 2.0 High Speedx1; Ethernet 10BASE-T/100BAS Standard; TIFF, AirPrint, Mopria, KYOCERA Mobile Scan FL ACS; Full Color; Gray 600dpi, 400dpi, 300dpi, 200 TIFF, JPEG, XPS, OpenXPS, PDF (MMR/JPEG compression/High-compression PDF), Text, Photo, Text + Photo Scan to SMB; Scan to E-mail; Scan to FTP or FTP or 200 addresses (Common address) Fax Fu Max. A4 (Leg	tx 600 dpi; 1,200 x 1,200 dpi ript 3 compatible), XPS, PDF Direct Print Ver. 1.7 6.0 sec / 7.5 sec PP over SSL/TLS, WSD Print, Apple Bonjour r 2012, Windows Server 2012 R2; Windows 7, Windows 10; Linux E-TX/1000BASE-T; USB Host Interface (USB Host)x2 JPEG, PDF, XPS Print, Google Cloud Print / Standard nctions scale; Black & White dpi, 200x400dpi, 200x100dpi Encrypted PDF, PDF/A-1, PDF/A-2, MS Office file (option), Searchable PDF (option) to, Light Text/Fine Line ver SSL; Scan to USB; TWAIN Scan; WSD Scan, WIA sist), 50 groups (Group address list) nctions al) - Min. A6	
PDL First Print Out Time Supported Protocol Operating System Sup Interface USB Memory Printing Mobile / e-mail Printin Color Selection Resolution File Format Image Type Mode Transmission Type Address Storage Original Size Coding Method / Trans	/ Format g smission Speed	600 x 600 dpi; 9600 Equivaler PRESCRIBE, PCL6 (PCL-XL, PCL Sc), KPDL3 (Postst 6.5 sec / 7.5 sec TCP/IP, NetBEUI, FTP, Port 9100, LPR, IPP, I Windows Server 2008, Windows Server 2008 R2, Windows Server USB 2.0 High Speedx1; Ethernet 10BASE-T/100BAS Standard; TIFF, AirPrint, Mopria, KYOCERA Mobile Scan FL ACS; Full Color; Gray 600dpi, 400dpi, 300dpi, 200 TIFF, JPEG, XPS, OpenXPS, PDF (MMR/JPEG compression/High-compression PDF), Text, Photo, Text + Photo Scan to SMB; Scan to E-mail; Scan to FTP or FTP o 200 addresses (Common address I Fax Fu Max. A4 (Let MMR, MR, MH,	tx 600 dpi; 1,200 x 1,200 dpi ript 3 compatible), XPS, PDF Direct Print Ver. 1.7 6.0 sec / 7.5 sec PP over SSL/TLS, WSD Print, Apple Bonjour r 2012, Windows Server 2012 R2; Windows 7, Windows 10; Linux E-TX/1000BASE-T; USB Host Interface (USB Host)x2 JPEG, PDF, XPS Print, Google Cloud Print / Standard nctions scale; Black & White dpi, 200x400dpi, 200x100dpi Encrypted PDF, PDF/A-1, PDF/A-2, MS Office file (option), Searchable PDF (option) to, Light Text/Fine Line ver SSL; Scan to USB; TWAIN Scan; WSD Scan, WIA ist), 50 groups (Group address list) nctions al) - Min. A6 JBIG / 33.6 kbps	
PDL First Print Out Time Supported Protocol Operating System Supported Operating System Operating Syst	/ Format g smission Speed	600 x 600 dpi; 9600 Equivaler PRESCRIBE, PCL6 (PCL-XL, PCL Sc), KPDL3 (Postst 6.5 sec / 7.5 sec TCP/IP, NetBEUI, FTP, Port 9100, LPR, IPP, I Windows Server 2008, Windows Server 2008 R2, Windows Server USB 2.0 High Speedx1; Ethernet 10BASE-T/100BAS Standard; TIFF, AirPrint, Mopria, KYOCERA Mobile Scan FL ACS; Full Color; Gray 600dpi, 400dpi, 300dpi, 200 TIFF, JPEG, XPS, OpenXPS, PDF (MMR/JPEG compression/High-compression PDF), Text, Photo, Text + Photo Scan to SMB; Scan to E-mail; Scan to FTP or FTP o 200 addresses (Common address Fax Fu Max. A4 (Lej MMR, MR, MH, 6MB / Yes /	tx 600 dpi; 1,200 x 1,200 dpi ript 3 compatible), XPS, PDF Direct Print Ver. 1.7 6.0 sec / 7.5 sec PP over SSL/TLS, WSD Print, Apple Bonjour r 2012, Windows Server 2012 R2; Windows 7, Windows 10; Linux E-TX/1000BASE-T; USB Host Interface (USB Host)x2 JPEG, PDF, XPS Print, Google Cloud Print / Standard nctions scale; Black & White dpi, 200x400dpi, 200x100dpi Encrypted PDF, PDF/A-1, PDF/A-2, MS Office file (option), Searchable PDF (option) to, Light Text/Fine Line ver SSL; Scan to USB; TWAIN Scan; WSD Scan, WIA ist), 50 groups (Group address list) nctions al) - Min. A6 JBIG / 33.6 kbps 100 numbers	
FDL First Print Out Time Supported Protocol Operating System Supported Dystem Supported USB Memory Printing Mobile / e-mail Printing Color Selection Resolution File Format Mage Type Mode Transmission Type Address Storage Original Size Coding Method / Trans Memory / Network FA	/ Format g smission Speed	600 x 600 dpi; 9600 Equivaler PRESCRIBE, PCL6 (PCL-XL, PCL Sc), KPDL3 (Postst 6.5 sec / 7.5 sec TCP/IP, NetBEUI, FTP, Port 9100, LPR, IPP, I Windows Server 2008, Windows Server 2008 R2, Windows Server USB 2.0 High Speedx1; Ethernet 10BASE-T/100BAS Standard; TIFF, AirPrint, Mopria, KYOCERA Mobile Scan FL ACS; Full Color; Gray 600dpi, 400dpi, 300dpi, 200 TIFF, JPEG, XPS, OpenXPS, PDF (MMR/JPEG compression/High-compression PDF), Text, Photo, Text + Photo Scan to SMB; Scan to E-mail; Scan to FTP or FTP o 200 addresses (Common address I Fax Fu Max. A4 (Let MMR, MR, MH,	tx 600 dpi; 1,200 x 1,200 dpi ript 3 compatible), XPS, PDF Direct Print Ver. 1.7 6.0 sec / 7.5 sec PP over SSL/TLS, WSD Print, Apple Bonjour r 2012, Windows Server 2012 R2; Windows 7, Windows 10; Linux E-TX/1000BASE-T; USB Host Interface (USB Host)x2 JPEG, PDF, XPS Print, Google Cloud Print / Standard nctions scale; Black & White dpi, 200x400dpi, 200x100dpi Encrypted PDF, PDF/A-1, PDF/A-2, MS Office file (option), Searchable PDF (option to, Light Text/Fine Line ver SSL; Scan to USB; TWAIN Scan; WSD Scan, WIA ist), 50 groups (Group address list) nctions al) - Min. A6 JBIG / 33.6 kbps 100 numbers	
PDL First Print Out Time Supported Protocol Operating System Supported Protocol Operating System Supporter JSB Memory Printing Mobile / e-mail Printin Resolution File Format mage Type Mode Fransmission Type Address Storage Original Size Coding Method / Trans Memory / Network FA Foner Kit	/ Format g smission Speed X / One Touch Dial	600 x 600 dpi; 9600 Equivalet PRESCRIBE, PCL6 (PCL-XL, PCL 5c), KPDL3 (Posts: 6.5 sec / 7.5 sec TCP/IP, NetBEUI, FTP, Port 9100, LPR, IPP, I Windows Server 2008, Windows Server 2008 R2, Windows Serve USB 2.0 High Speedx1; Ethernet 10BASE-T/100BAS Standard; TIFF, AirPrint, Mopria, KYOCERA Mobile Scan FL ACS; Full Color; Gray 600dpi, 400dpi, 300dpi, 200 TIFF, JPEG, XPS, OpenXPS, PDF (MMR/JPEG compression/High-compression PDF), Text, Photo, Text + Phc Scan to SMB; Scan to E-mail; Scan to FTP or FTP o 200 addresses (Common address I Fax Fu Max. A4 (Let MMR, MR, MH, 6MB / Yes / Consumable TK-5275K: Black (8,000 pages) TK-5275C: Cyan (6,000 pages)	tx 600 dpi; 1,200 x 1,200 dpi ript 3 compatible), XPS, PDF Direct Print Ver. 1.7 6.0 sec / 7.5 sec PP over SSL/TLS, WSD Print, Apple Bonjour r 2012, Windows Server 2012 R2; Windows 7, Windows 10; Linux E-TX/1000BASE-T; USB Host Interface (USB Host)x2 JPEG, PDF, XPS Print, Google Cloud Print / Standard nctions scale; Black & White dpi; 200x400dpi, 200x100dpi Encrypted PDF, PDF/A-1, PDF/A-2, MS Office file (option), Searchable PDF (option to, Light Text/Fine Line ver SSL; Scan to USB; TWAIN Scan; WSD Scan, WIA sist), 50 groups (Group address list) inctions gal) - Min. A6 JBIG / 33.6 kbps	
PDL First Print Out Time Supported Protocol Operating System Supported Protocol Operating System Supported Printing Obole / e-mail Printing Obole / e-mail Printing Obole Selection Resolution File Format Image Type Mode Fransmission Type Oddress Storage Original Size Coding Method / Trans Obole Printing Ob	/ Format g smission Speed X / One Touch Dial	600 x 600 dpi; 9600 Equivalet PRESCRIBE, PCL6 (PCL-XL, PCL 5c), KPDL3 (Posts: 6.5 sec / 7.5 sec TCP/IP, NetBEUI, FTP, Port 9100, LPR, IPP, I Windows Server 2008, Windows Server 2008 R2, Windows Serve USB 2.0 High Speedx1; Ethernet 10BASE-T/100BAS Standard; TIFF, AirPrint, Mopria, KYOCERA Mobile Scan FU ACS; Full Color; Gray 600dpi, 400dpi, 300dpi, 200 TIFF, JPEG, XPS, OpenXPS, PDF (MMR/JPEG compression/High-compression PDF), Text, Photo, Text + Pho Scan to SMB; Scan to E-mail; Scan to FTP or FTP o 200 addresses (Common address) Fax Fu Max. A4 (Lej MMR, MR, MH, 6MB / Yes / Consumable TK-5275K : Black (8,000 pages)	tx 600 dpi; 1,200 x 1,200 dpi ript 3 compatible), XPS, PDF Direct Print Ver. 1.7 6.0 sec / 7.5 sec PP over SSL/TLS, WSD Print, Apple Bonjour r 2012, Windows Server 2012 R2; Windows 7, Windows 10; Linux E-TX/1000BASE-T; USB Host Interface (USB Host)x2 JPEG, PDF, XPS Print, Google Cloud Print / Standard nctions scale; Black & White dipl, 200x400dpi, 200x100dpi Encrypted PDF, PDF/A-1, PDF/A-2, MS Office file (option), Searchable PDF (option to, Light Text/Fine Line ver SSL; Scan to USB; TWAIN Scan; WSD Scan, WIA sist), 50 groups (Group address list) nctions al) - Min. A6 JBIG / 33.6 kbps 100 numbers s & Options TK-5285K : Black (13,000 pages)	
PDL First Print Out Time Supported Protocol Operating System Supported Protocol Operating System Supported Protocol Operating System Supported Printing Obolie / e-mail Pri	/ Format g smission Speed X / One Touch Dial	600 x 600 dpi; 9600 Equivalet PRESCRIBE, PCL6 (PCL-XL, PCL Sc), KPDL3 (Posts: 6.5 sec / 7.5 sec TCP/IP, NetBEUI, FTP, Port 9100, LPR, IPP, I Windows Server 2008, Windows Server 2008 R2, Windows Server USB 2.0 High Speedx1; Ethernet 10BASE-T/100BAS Standard; TIFF, AirPrint, Mopria, KYOCERA Mobile Scan FL ACS; Full Color; Gray 600dpi, 400dpi, 300dpi, 200 TIFF, JPEG, XPS, OpenXPS, PDF (MMR/JPEG compression/High-compression PDF), Text, Photo, Text + Photo Scan to SMB; Scan to E-mail; Scan to FTP or FTP o 200 addresses (Common address I Fax Fu Max. A4 (Lej MMR, MR, MH, 6MB / Yes / Consumable TK-5275K: Black (8,000 pages) TK-5275C: Cyan (6,000 pages) TK-5275C: Cyan (6,000 pages)	tx 600 dpi; 1,200 x 1,200 dpi ript 3 compatible), XPS, PDF Direct Print Ver. 1.7 6.0 sec / 7.5 sec PP over SSL/TLS, WSD Print, Apple Bonjour r 2012, Windows Server 2012 R2; Windows 7, Windows 10; Linux E-TX/1000BASE-T; USB Host Interface (USB Host)x2 JPEG, PDF, XPS Print, Google Cloud Print / Standard nctions scale; Black & White dpi, 200x400dpi, 200x100dpi Encrypted PDF, PDF/A-1, PDF/A-2, MS Office file (option), Searchable PDF (option to, Light Text/Fine Line ver SSL; Scan to USB; TWAIN Scan; WSD Scan, WIA ist), 50 groups (Group address list) nctions al) - Min. A6 JBIG / 33.6 kbps 100 numbers us & Options TK-5285K : Black (13,000 pages) TK-5285C : Cyan (11,000 pages) TK-5285M : Magenta (11,000 pages)	
PDL First Print Out Time Supported Protocol Operating System Supported Protocol Operating System Supporter Operating System System System System Supporter Operating System Syste	/ Format g smission Speed X / One Touch Dial	600 x 600 dpi; 9600 Equivaler PRESCRIBE, PCL6 (PCL-XL, PCL Sc), KPDL3 (Postst 6.5 sec / 7.5 sec TCP/IP, NetBEUI, FTP, Port 9100, LPR, IPP, I Windows Server 2008, Windows Server 2008 R2, Windows Server USB 2.0 High Speedx1; Ethernet 10BASE-T/100BAS Standard; TIFF, AirPrint, Mopria, KYOCERA Mobile Scan FU ACS; Full Color; Gray 600dpi, 400dpi, 300dpi, 200 TIFF, JPEG, XPS, OpenXPS, PDF (MMR/JPEG compression/High-compression PDF), Text, Photo, Text + Photo Scan to SMB; Scan to E-mail; Scan to FTP or FTP o 200 addresses (Common address Fax Fu Max. A4 (Let MMR, MR, MH, 6MB / Yes / Consumable TK-5275K: Black (8,000 pages) TK-5275C: Cyan (6,000 pages) TK-5275Y: Yellow (6,000 pages) TK-5275Y: Yellow (6,000 pages)	tx 600 dpi; 1,200 x 1,200 dpi ript 3 compatible), XPS, PDF Direct Print Ver. 1.7 6.0 sec / 7.5 sec PP over SSL/TLS, WSD Print, Apple Bonjour r 2012, Windows Server 2012 R2; Windows 7, Windows 10; Linux E-TX/1000BASE-T; USB Host Interface (USB Host)x2 JPEG, PDF, XPS Print, Google Cloud Print / Standard nctions scale; Black & White dpi, 200x400dpi, 200x100dpi Encrypted PDF, PDF/A-1, PDF/A-2, MS Office file (option), Searchable PDF (option to, Light Text/Fine Line ver SSL; Scan to USB; TWAIN Scan; WSD Scan, WIA ist), 50 groups (Group address list) nctions al) - Min. A6 JBIG / 33.6 kbps 100 numbers us & Options TK-5285K : Black (13,000 pages) TK-5285M: Magenta (11,000 pages) TK-5285M: Magenta (11,000 pages) TK-5285Y: Yellow (11,000 pages)	
FDL First Print Out Time Supported Protocol Deprating System Supported Protocol Deprating System Supported Printing System Supported Printing Mobile / e-mail Printing Color Selection Resolution File Format Image Type Mode Iransmission Type Address Storage Driginal Size Coding Method / Trans Memory / Network FA Toner Kit (Page Yield in accordat ISO / IEC 19798) Capacity of Start up To Maintenance Kit	/ Format g smission Speed X / One Touch Dial	600 x 600 dpi; 9600 Equivaler PRESCRIBE, PCL6 (PCL-XL, PCL Sc), KPDL3 (Postst 6.5 sec / 7.5 sec TCP/IP, NetBEUI, FTP, Port 9100, LPR, IPP, I Windows Server 2008, Windows Server 2008 R2, Windows Server USB 2.0 High Speedx1; Ethernet 10BASE-T/100BAS Standard; TIFF, AirPrint, Mopria, KYOCERA Mobile Scan FU ACS; Full Color; Gray 600dpi, 400dpi, 300dpi, 200 TIFF, JPEG, XPS, OpenXPS, PDF (MMR/JPEG compression/High-compression PDF), Text, Photo, Text + Photo Scan to SMB; Scan to E-mail; Scan to FTP or FTP o 200 addresses (Common address) Fax Fu Max. A4 (Let MMR, MR, MH, 6MB / Yes / Consumable TK-5275K: Black (8,000 pages) TK-5275V: Yellow (6,000 pages) TK-5275Y: Yellow (6,000 pages) Black 3,500 pages; Cyan/Magenta/Yellow 2,500 pages	tx 600 dpi; 1,200 x 1,200 dpi ript 3 compatible), XPS, PDF Direct Print Ver. 1.7 6.0 sec / 7.5 sec PP over SSL/TLS, WSD Print, Apple Bonjour r 2012, Windows Server 2012 R2; Windows 7, Windows 10; Linux E-TX/1000BASE-T; USB Host Interface (USB Host)x2 JPEG, PDF, XPS Print, Google Cloud Print / Standard nctions scale; Black & White dpi, 200x400dpi, 200x100dpi Encrypted PDF, PDF/A-1, PDF/A-2, MS Office file (option), Searchable PDF (option to, Light Text/Fine Line ver SSL; Scan to USB; TWAIN Scan; WSD Scan, WIA sist), 50 groups (Group address list) nctions al) - Min. A6 JBIG / 33.6 kbps 100 numbers us & Options TK-5285K : Black (13,000 pages) TK-5285M: Magenta (11,000 pages) TK-5285Y: Yellow (11,000 pages) TK-5285Y: Yellow (11,000 pages) Black 6,000 pages; Cyan/Magenta/Yellow 5,000 pages	
PDL First Print Out Time Supported Protocol Operating System Supported Protocol Operating System Supported Protocol Operating System Supported Printing Mobile / e-mail Printing Mobile / e-mail Printing Color Selection Resolution File Format Image Type Mode Transmission Type Address Storage Original Size Coding Method / Trans Memory / Network FA Toner Kit (Page Yield in accordat ISO / IEC 19798) Capacity of Start up To Maintenance Kit Paper Feeder	/ Format g smission Speed X / One Touch Dial	600 x 600 dpi; 9600 Equivaler PRESCRIBE, PCL6 (PCL-XL, PCL Sc), KPDL3 (Postsr 6.5 sec / 7.5 sec TCP/IP, NetBEUI, FTP, Port 9100, LPR, IPP, I Windows Server 2008, Windows Server 2008 R2, Windows Server USB 2.0 High Speedx1; Ethernet 10BASE-T/100BAS Standard; TIFF, AirPrint, Mopria, KYOCERA Mobile Scan FU ACS; Full Color; Gray 600dpi, 400dpi, 300dpi, 200 TIFF, JPEG, XPS, OpenXPS, PDF (MMR/JPEG compression/High-compression PDF), Text, Photo, Text + Photo Scan to SMB; Scan to E-mail; Scan to FTP or FTP o 200 addresses (Common address Fax Fu Max. A4 (Let MMR, MR, MH, 6MB / Yes / Consumable TK-5275K: Black (8,000 pages) TK-5275Y: Yellow (6,000 pages) TK-5275Y: Yellow (6,000 pages) TK-5275Y: Yellow (6,000 pages) Black 3,500 pages; Cyan/Magenta/Yellow 2,500 pages MK-5144 (200,000 pages); DP:MK-3140	tx 600 dpi; 1,200 x 1,200 dpi ript 3 compatible), XPS, PDF Direct Print Ver. 1.7 6.0 sec / 7.5 sec PP over SSL/TLS, WSD Print, Apple Bonjour r 2012, Windows Server 2012 R2; Windows 7, Windows 10; Linux E-TX/1000BASE-T; USB Host Interface (USB Host)x2 JPEG, PDF, XPS Print, Google Cloud Print / Standard nctions scale; Black & White dpi, 200x400dpi, 200x100dpi Encrypted PDF, PDF/A-1, PDF/A-2, MS Office file (option), Searchable PDF (option to, Light Text/Fine Line ver SSL; Scan to USB; TWAIN Scan; WSD Scan, WIA sist), 50 groups (Group address list) nctions al) - Min. A6 JBIG / 33.6 kbps 100 numbers us & Options TK-5285K : Black (13,000 pages) TK-5285M: Magenta (11,000 pages) TK-5285M: Magenta (11,000 pages) TK-5285Y: Yellow (11,000 pages) Black 6,000 pages; Cyan/Magenta/Yellow 5,000 pages MK-5159 (200,000 pages); DP:MK-5200 neets (Max. x3)	
PDL First Print Out Time Supported Protocol Operating System Supported Protocol Operating System Supported Protocol Operating System Supported Printing Mobile / e-mail Printing Mobile / e-mail Printing Color Selection Resolution File Format Image Type Mode Transmission Type Address Storage Original Size Coding Method / Trans Memory / Network FA Toner Kit (Page Yield in accordation of the Color Start up To Maintenance Kit Paper Feeder Data Security	/ Format g smission Speed X / One Touch Dial	600 x 600 dpi; 9600 Equivaler PRESCRIBE, PCL6 (PCL-XL, PCL Sc), KPDL3 (Posts: 6.5 sec / 7.5 sec TCP/IP, NetBEUI, FTP, Port 9100, LPR, IPP, I Windows Server 2008, Windows Server 2008 R2, Windows Server USB 2.0 High Speedx1; Ethernet 10BASE-T/100BAS Standard; TIFF, AirPrint, Mopria, KYOCERA Mobile Scan FU ACS; Full Color; Gray 600dpi, 400dpi, 300dpi, 200 TIFF, JPEG, XPS, OpenXPS, PDF (MMR/JPEG compression/High-compression PDF), Text, Photo, Text + Phot Scan to SMB; Scan to E-mail; Scan to FTP or FTP o 200 addresses (Common address) Fax Fu Max. A4 (Let MMR, MR, MH, 6MB / Yes / Consumable TK-5275K: Black (8,000 pages) TK-5275Y: Yellow (6,000 pages) TK-5275Y: Yellow (6,000 pages) Black 3,500 pages; Cyan/Magenta (9,000 pages) MK-5144 (200,000 pages); DP:MK-3140	tx 600 dpi; 1,200 x 1,200 dpi ript 3 compatible), XPS, PDF Direct Print Ver. 1.7 6.0 sec / 7.5 sec PP over SSL/TLS, WSD Print, Apple Bonjour r 2012, Windows Server 2012 R2; Windows 7, Windows 10; Linux E-TX/1000BASE-T; USB Host Interface (USB Host)x2 JPEG, PDF, XPS Print, Google Cloud Print / Standard nctions scale; Black & White dpi, 200x400dpi, 200x100dpi Encrypted PDF, PDF/A-1, PDF/A-2, MS Office file (option), Searchable PDF (option to, Light Text/Fine Line ver SSL; Scan to USB; TWAIN Scan; WSD Scan, WIA sist), 50 groups (Group address list) nctions all) - Min. A6 JBIG / 33.6 kbps 100 numbers ss & Options TK-5285K : Black (13,000 pages) TK-5285C : Cyan (11,000 pages) TK-5285Y : Yellow (11,000 pages) Black 6,000 pages; Cyan/Magenta/Yellow 5,000 pages MK-5159 (200,000 pages); DP:MK-5200 neets (Max. x3) rity Kit(E)	
PDL First Print Out Time Supported Protocol Operating System Supported Protocol Operating System Supported Protocol Operating System Supported Printing Mobile / e-mail Printing Mobile / e-mail Printing Color Selection Resolution File Format Image Type Mode Transmission Type Address Storage Original Size Coding Method / Trans Memory / Network FA Toner Kit (Page Yield in accordat ISO / IEC 19798) Capacity of Start up To Maintenance Kit Paper Feeder Data Security Card Authentication	Format g smission Speed X / One Touch Dial	600 x 600 dpi; 9600 Equivaler PRESCRIBE, PCL6 (PCL-XL, PCL 5c), KPDL3 (Postsr 6.5 sec / 7.5 sec TCP/IP, NetBEUI, FTP, Port 9100, LPR, IPP, I Windows Server 2008, Windows Server 2008 R2, Windows Server USB 2.0 High Speedx1; Ethernet 10BASE-T/100BAS Standard; TIFF, AirPrint, Mopria, KYOCERA Mobile Scan FU ACS; Full Color; Gray 600dpi, 400dpi, 300dpi, 200 TIFF, JPEG, XPS, OpenXPS, PDF (MMR/JPEG compression/High-compression PDF), Text, Photo, Text + Pho Scan to SMB; Scan to E-mail; Scan to FTP or FTP o 200 addresses (Common address Fax Fu Max. A4 (Let MMR, MR, MH, 6MB / Yes / Consumable TK-5275K: Black (8,000 pages) TK-5275K: Cyan (6,000 pages) TK-5275Y: Yellow (6,000 pages) Black 3,500 pages; Cyan/Magenta/Yellow 2,500 pages MK-5144 (200,000 pages); DP:MK-3140 PF-5100: 500 s	tx 600 dpi; 1,200 x 1,200 dpi ript 3 compatible), XPS, PDF Direct Print Ver. 1.7 6.0 sec / 7.5 sec PP over SSL/TLS, WSD Print, Apple Bonjour r 2012, Windows Server 2012 R2; Windows 7, Windows 10; Linux E-TX/1000BASE-T; USB Host Interface (USB Host)x2 JPEG, PDF, XPS Print, Google Cloud Print / Standard nctions scale; Black & White dpi, 200x400dpi, 200x100dpi Encrypted PDF, PDF/A-1, PDF/A-2, MS Office file (option), Searchable PDF (option to, Light Text/Fine Line ver SSL; Scan to USB; TWAIN Scan; WSD Scan, WIA sist), 50 groups (Group address list) hottons all ING / 33.6 kbps 100 numbers ss & Options TK-5285K: Black (13,000 pages) TK-5285C: Cyan (11,000 pages) TK-5285Y: Yellow (11,000 pages) TK-5285Y: Yellow (11,000 pages) Black 6,000 pages; Cyan/Magenta/Yellow 5,000 pages MK-5159 (200,000 pages); DP:MK-5200 heets (Max. x3) rity Kit(E) ication Kit(B)	
PDL First Print Out Time Supported Protocol Operating System Supinterface USB Memory Printing Mobile / e-mail Printin Color Selection Resolution File Format Image Type Mode Transmission Type Address Storage Original Size Coding Method / Trans Memory / Network FA Toner Kit (Page Yield in accordat ISO / IEC 19798) Capacity of Start up To Maintenance Kit Paper Feeder Data Security Card Authentication Gigabit Ethernet Board	/ Format g smission Speed X / One Touch Dial	600 x 600 dpi; 9600 Equivaler PRESCRIBE, PCL6 (PCL-XL, PCL 5c), KPDL3 (Posts: 6.5 sec / 7.5 sec TCP/IP, NetBEUI, FTP, Port 9100, LPR, IPP, I Windows Server 2008, Windows Server 2008 R2, Windows Server USB 2.0 High Speedx1; Ethernet 10BASE-T/100BAS Standard; TIFF, AirPrint, Mopria, KYOCERA Mobile Scan FU ACS; Full Color; Gray 600dpi, 400dpi, 300dpi, 200 TIFF, JPEG, XPS, OpenXPS, PDF (MMR/JPEG compression/High-compression PDF), Text, Photo, Text + Phot Scan to SMB; Scan to E-mail; Scan to FTP or FTP or 200 addresses (Common address Fax Fu Max. A4 (Let MMR, MH, 6MB / Yes / Consumable TK-5275K: Black (8,000 pages) TK-5275C: Cyan (6,000 pages) TK-5275Y: Yellow (6,000 pages) Black 3,500 pages; Cyan/Magenta/Yellow 2,500 pages MK-5144 (200,000 pages); DP:MK-3140 PF-5100: 500 s Data Sect	tx 600 dpi; 1,200 x 1,200 dpi ript 3 compatible), XPS, PDF Direct Print Ver. 1.7 6.0 sec / 7.5 sec PP over SSL/TLS, WSD Print, Apple Bonjour r 2012, Windows Server 2012 R2; Windows 7, Windows 10; Linux E-TX/1000BASE-T; USB Host Interface (USB Host)x2 JPEG, PDF, XPS Print, Google Cloud Print / Standard nctions scale; Black & White dpi, 200x400dpi, 200x100dpi Encrypted PDF, PDF/A-1, PDF/A-2, MS Office file (option), Searchable PDF (option to, Light Text/Fine Line ver SSL; Scan to USB; TWAIN Scan; WSD Scan, WIA sist), 50 groups (Group address list) nctions lal) - Min. A6 JBIG / 33.6 kbps 100 numbers us & Options TK-5285K : Black (13,000 pages) TK-5285C : Cyan (11,000 pages) TK-5285K : Cyan (11,000 pages) TK-5285F : Ellow (11,000 pages) TK-5285F : Ellow (11,000 pages) TK-5285F : Ellow (11,000 pages) TK-5285F : Poliow (11,000 pages)	
PDL First Print Out Time Supported Protocol Operating System Supinterface USB Memory Printing Mobile / e-mail Printin Color Selection Resolution File Format Image Type Mode Transmission Type Address Storage Original Size Coding Method / Trans Memory / Network FA Toner Kit (Page Yield in accordal ISO / IEC 19798) Capacity of Start up To Maintenance Kit Paper Feeder Data Security Card Authentication Gigabit Ethernet Board Wireless LAN Interface	/ Format g smission Speed X / One Touch Dial	600 x 600 dpi; 9600 Equivalet PRESCRIBE, PCL6 (PCL-XL, PCL 5c), KPDL3 (Posts: 6.5 sec / 7.5 sec TCP/IP, NetBEUI, FTP, Port 9100, LPR, IPP, I Windows Server 2008, Windows Server 2008 R2, Windows Server USB 2.0 High Speedx1; Ethernet 10BASE-T/100BAS Standard; TIFF, AirPrint, Mopria, KYOCERA Mobile Scan Ft ACS; Full Color; Gray 600dpi, 400dpi, 300dpi, 200 TIFF, JPEG, XPS, OpenXPS, PDF (MMR/JPEG compression/High-compression PDF), Text, Photo, Text + Photo Scan to SMB; Scan to E-mail; Scan to FTP or FTP or 200 addresses (Common address Fax Fu Max. A4 (Let MMR, MR, MH, 6MB / Yes / Consumable TK-5275K: Black (8,000 pages) TK-5275C: Cyan (6,000 pages) TK-5275Y: Yellow (6,000 pages) TK-5275Y: Yellow (6,000 pages) Black 3,500 pages; Cyan/Magenta/Yellow 2,500 pages MK-5144 (200,000 pages); DP:MK-3140 PF-5100: 500 s Data Sect Card Authen	tx 600 dpi; 1,200 x 1,200 dpi ript 3 compatible), XPS, PDF Direct Print Ver. 1.7 6.0 sec / 7.5 sec PP over SSL/TLS, WSD Print, Apple Bonjour r 2012, Windows Server 2012 R2; Windows 7, Windows 10; Linux E-TX/1000BASE-T; USB Host Interface (USB Host)x2 JPEG, PDF, XPS Print, Google Cloud Print / Standard nctions scale; Black & White dpi, 200x400dpi, 200x100dpi Encrypted PDF, PDF/A-1, PDF/A-2, MS Office file (option), Searchable PDF (option to, Light Text/Fine Line ver SSL; Scan to USB; TWAIN Scan; WSD Scan, WIA sist), 50 groups (Group address list) nctions lal) - Min. A6 JBIG / 33.6 kbps 100 numbers us & Options TK-5285K : Black (13,000 pages) TK-5285C : Cyan (11,000 pages) TK-5285C : Cyan (11,000 pages) TK-5285S : Wileow (11,000 pages) TK-5285Y : Villow (11,000 pages) Black 6,000 pages; Cyan/Magenta/Yellow 5,000 pages MK-5159 (200,000 pages); DP:MK-5200 neets (Max. x3) rity Kit(E) sication Kit(B) 50 (irreless LAN / WiFi Direct)	
PDL First Print Out Time Supported Protocol Operating System Supported Protocol Operating System Supported Protocol Operating System Supported Printing Mobile / e-mail Printing Mobile / e-mail Printing Color Selection Resolution File Format Image Type Mode Transmission Type Address Storage Original Size Coding Method / Trans Memory / Network FA Toner Kit (Page Yield in accordat ISO / IEC 19798) Capacity of Start up To Maintenance Kit Paper Feeder Data Security Card Authentication Gigabit Ethernet Board Wireless LAN Interface Storage Device	/ Format g smission Speed X / One Touch Dial	600 x 600 dpi; 9600 Equivalet PRESCRIBE, PCL6 (PCL-XL, PCL 5c), KPDL3 (Posts: 6.5 sec / 7.5 sec TCP/IP, NetBEUI, FTP, Port 9100, LPR, IPP, I Windows Server 2008, Windows Server 2008 R2, Windows Server USB 2.0 High Speedx1; Ethernet 10BASE-T/100BAS Standard; TIFF, AirPrint, Mopria, KYOCERA Mobile Scan Ft ACS; Full Color; Gray 600dpi, 400dpi, 300dpi, 200 TIFF, JPEG, XPS, OpenXPS, PDF (MMR/JPEG compression/High-compression PDF), Text, Photo, Text + Photo Scan to SMB; Scan to E-mail; Scan to FTP or FTP or 200 addresses (Common address in Max. A4 (Leg MMR, MR, MH, 6MB / Yes / Consumable TK-5275K: Black (8,000 pages) TK-5275Y: Yellow (6,000 pages) TK-5275Y: Yellow (6,000 pages) TK-5275Y: Yellow (6,000 pages) Black 3,500 pages; Cyan/Magenta/Yellow 2,500 pages MK-5144 (200,000 pages); DP:MK-3140 PF-5100: 500 s Data Sect Card Authen B IB-36 (802.11 b / g / n / y	tx 600 dpi; 1,200 x 1,200 dpi ript 3 compatible), XPS, PDF Direct Print Ver. 1.7 6.0 sec / 7.5 sec Prover SSL/TLS, WSD Print, Apple Bonjour r 2012, Windows Server 2012 R2; Windows 7, Windows 10; Linux E-TX/1000BASE-T; USB Host Interface (USB Host)x2 JPEG, PDF, XPS Print, Google Cloud Print / Standard nctions scale; Black & White dpi, 200x400dpi, 200x100dpi Encrypted PDF, PDF/A-1, PDF/A-2, MS Office file (option), Searchable PDF (option) to, Light Text/Fine Line ver SSL; Scan to USB; TWAIN Scan; WSD Scan, WIA sist), 50 groups (Group address list) nctions lal) - Min. A6 JBIG / 33.6 kbps 100 numbers us & Options TK-5285K : Black (13,000 pages) TK-5285C : Cyan (11,000 pages) TK-5285K : Magenta (11,000 pages) TK-5285Y : Vellow (11,000 pages) TK-5285Y : Vellow (11,000 pages) TK-5285Y : Window (11,000 pages) TK-5285Y :	
PDL First Print Out Time Supported Protocol Operating System Sup Interface USB Memory Printing Mobile / e-mail Printin Color Selection Resolution	/ Format g smission Speed X / One Touch Dial	600 x 600 dpi; 9600 Equivalet PRESCRIBE, PCL6 (PCL-XL, PCL 5c), KPDL3 (Posts: 6.5 sec / 7.5 sec TCP/IP, NetBEUI, FTP, Port 9100, LPR, IPP, I Windows Server 2008, Windows Server 2008 R2, Windows Server USB 2.0 High Speedx1; Ethernet 10BASE-T/100BAS Standard; TIFF, AirPrint, Mopria, KYOCERA Mobile Scan Ft ACS; Full Color; Gray 600dpi, 400dpi, 300dpi, 200 TIFF, JPEG, XPS, OpenXPS, PDF (MMR/JPEG compression/High-compression PDF), Text, Photo, Text + Photo Scan to SMB; Scan to E-mail; Scan to FTP or FTP or 200 addresses (Common address I Fax Fu Max. A4 (LH, MMR, MR, MH, 6MB / Yes / Consumable TK-5275K: Black (8,000 pages) TK-5275C: Cyan (6,000 pages) TK-5275Y: Yellow (6,000 pages) TK-5275Y: Yellow (6,000 pages) Black 3,500 pages; Cyan/Magenta/Yellow 2,500 pages MK-5144 (200,000 pages); DP:MK-3140 PF-5100: 500 s Data Sect Card Authen IB IB-36 (802.11 b / g / n / V HD-6: SSD 32GB;	tx 600 dpi; 1,200 x 1,200 dpi ript 3 compatible), XPS, PDF Direct Print Ver. 1.7 6.0 sec / 7.5 sec Prover SSL/TLS, WSD Print, Apple Bonjour r 2012, Windows Server 2012 R2; Windows 7, Windows 10; Linux E-TX/1000BASE-T; USB Host Interface (USB Host)x2 JPEG, PDF, XPS Print, Google Cloud Print / Standard nctions scale; Black & White dpi, 200x400dpi, 200x100dpi Encrypted PDF, PDF/A-1, PDF/A-2, MS Office file (option), Searchable PDF (option) to, Light Text/Fine Line ver SSL; Scan to USB; TWAIN Scan; WSD Scan, WIA sist), 50 groups (Group address list) nctions lal) - Min. A6 JBIG / 33.6 kbps 100 numbers us & Options TK-5285K : Black (13,000 pages) TK-5285C : Cyan (11,000 pages) TK-5285K : Yellow (11,000 pages) TK-5285Y : Yellow (11,000 pages)	













KYOCERA Document Solutions Singapore Pte. Ltd.

12 Tai Seng Street #04-01A Luxasia Building Singapore 534118 Tel : (65) 6741 8733 Fax: (65) 6748 3788 www.KyoceraDocumentSolutions.com.sg

*KYOCERA Document Solutions does not warrant that any specifications mentioned will be error-free. Specifications are subject to change without notice. Information is correct at time of going to press. All other brand and product names may be registered $trademarks\ or\ trademarks\ of\ their\ respective\ holders\ and\ are\ hereby\ acknowledged.$

