



imageRUNNER ADVANCE DX 4700 Series

CONNECT SECURELY, TRANSFORM DIGITALLY

INNOVATIVE SCAN TECHNOLOGY AND SMART SOFTWARE WORK HAND-IN-HAND

The future of business is digital. Canon imageRUNNER ADVANCE DX is a new generation of smart multifunction devices, designed to support and accelerate every step of your digital transformation. Built with Canon's imageRUNNER ADVANCE DNA, state-of-the-art technology and software work hand-in-hand to digitise, automate and optimise content-centric workflows.

Canon's imageRUNNER ADVANCE DX 4700 Series offers smart and secure A3 mono multifunction devices that maximise workflow efficiency, without compromising on security. New scanning technology ensures high-speed and pinpoint accuracy, while uniFLOW Online Express - which comes as standard - delivers cloud connectivity and basic print management.



**CLOUD
CONNECTIVITY**



SECURITY

McAfee
PROTECTED



PRODUCTIVITY



SUSTAINABILITY



Canon uniFLOW Online
Outstanding Cloud Output Management Solution

New to the Line

Canon

imageRUNNER ADVANCE DX 4700 Series



CLOUD CONNECTIVITY

- Scan and print documents from any location with enhanced cloud connectivity, offered with re-usable print formats for ease of use
- Cloud-based software-as-standard uniFLOW Online Express offers a single integrated solution to enhance device security and simplify print management
- Canon's MEAP platform optimises processes by integrating with document capture and output management solutions and various applications such as uniFLOW Online*, AirPrint, Mopria, Google Cloud Print and Canon PRINT Business



SECURITY

- Ensure information confidentiality and security across the network with IPsec and firewall functionality
- Set up device authentication, two-factor authentication and device function restrictions for both device and cloud-based security measures
- Encrypted PDF scanning ensures document security during scanning process
- Upgrade to uniFLOW Online* for enhanced secure printing, mobile printing, and guest printing from any device
- Combination of Verify system at start up and McAfee Embedded Control Software ensures device functionality is never compromised from the tampering of firmware and applications, all in real-time.



PRODUCTIVITY

- Fast, high-quality scanning at 270 ipm (A4) with expansive connectivity options
- Automated scan, store and search workflows boost efficiency and reduce human error
- Device management tools such as iWMC provide centralised control over the device fleet and print management
- Automatic removal of blank pages when scanning minimises process times
- Reusable formats, automatic file names from barcode data, Office format conversions, cloud and device OCR with IRIS enable easy handling and fast document processing



SUSTAINABILITY

- Edit print settings at device-level for accurate scan output
- Quiet operation and reduced paper hitting sounds during scanning is enabled thanks to technologies such as digital registration and a smooth ADF internal structure
- Automated and digitised processes minimise paper usage for a paperless office
- Reduce waste with high-quality scanning, including digital deskewing and advanced stain-resistant glass

*uniFLOW Online is available as a Device Based Cloud Subscription for Document Output and Capture Management. Based on business needs, users can upgrade to uniFLOW Online to unlock a range of advanced benefits, including: Increased security with user authentication methods. Personalised workflows to enhance productivity. Reduced wastage by releasing jobs at the device. An intuitive cloud dashboard to leverage real-time data. Greater control over access and usage to reduce print costs.

QUICK FACTS



- **Format:** Mono A3
- **Paper Supply Capacity (Max):** 6,350 sheets
- **Warm-up time:** 4 seconds or less
- **Finishing Capabilities:** Collate, Group, Offset, Staple, Saddle Stitch, Hole Punch, Eco Staple, Staple On Demand
- **Supported File Types:** PDF, EPS, TIFF, JPEG, and XPS



- **Print speed:** 25-51 ppm (A4)
- **Scan Speed:** 270 ipm (A4)



- **Print Languages:** UFR II, PCL6, Adobe® PostScript 3™ (optional)
- **Print Resolution:** 1,200 x 1,200

- Enhanced cloud connectivity enables collaborative document access from anywhere, with re-usable formats for easy handling
- Accurate, high-speed scanning is facilitated by Canon's innovative new paper feeding mechanism and stain-resistant glass
- Efficient workflow automation means documents are intuitively scanned, searched and stored with applications including OneDrive, SharePoint, Concur and Dropbox
- McAfee Embedded Control software alongside with other security features offer complete peace of mind and a 360° protection covering: document, network and device
- Simplified print management is enabled with centrally-managed print settings and device usage analysis, provided through native uniFLOW Online Express
- Quiet ADF operation, low energy consumption and reduced emissions lower environmental impacts

TAILORED SOLUTIONS TO MEET EVERY CHALLENGE

CORE

Perform routine office operations safely and with ease, with minimum hardware, embedded software including UFOE and services offering complete device maintenance and support.



HARDWARE



SOFTWARE



SERVICES

ENHANCED

Boost performance with enhancements such as finishing options and security add-ons e.g. Data Removal Service. Choose solutions to expand cloud capabilities with uniFLOW Online including advanced scanning directly with your Google account.

BESPOKE

Choose tailored solutions for any business need by removing print management burdens. Consult with Canon experts to manage your extensive requirements, with bespoke solutions and Managed Services options.

Canon

Canon Inc.
canon.com

Canon Europe
canon-europe.com

English edition
© Canon Europa N.V., 2020

imageRUNNER ADVANCE DX 4700 Series

MONO A3 MULTIFUNCTION DEVICES WITH ENHANCED CLOUD CONNECTIVITY THAT ALLOW YOU TO COLLABORATE SECURELY FROM ANYWHERE


MAIN CONFIGURATION OPTIONS



Canon uniFLOW Online
Outstanding Cloud Output/Management Solution



New to the Line

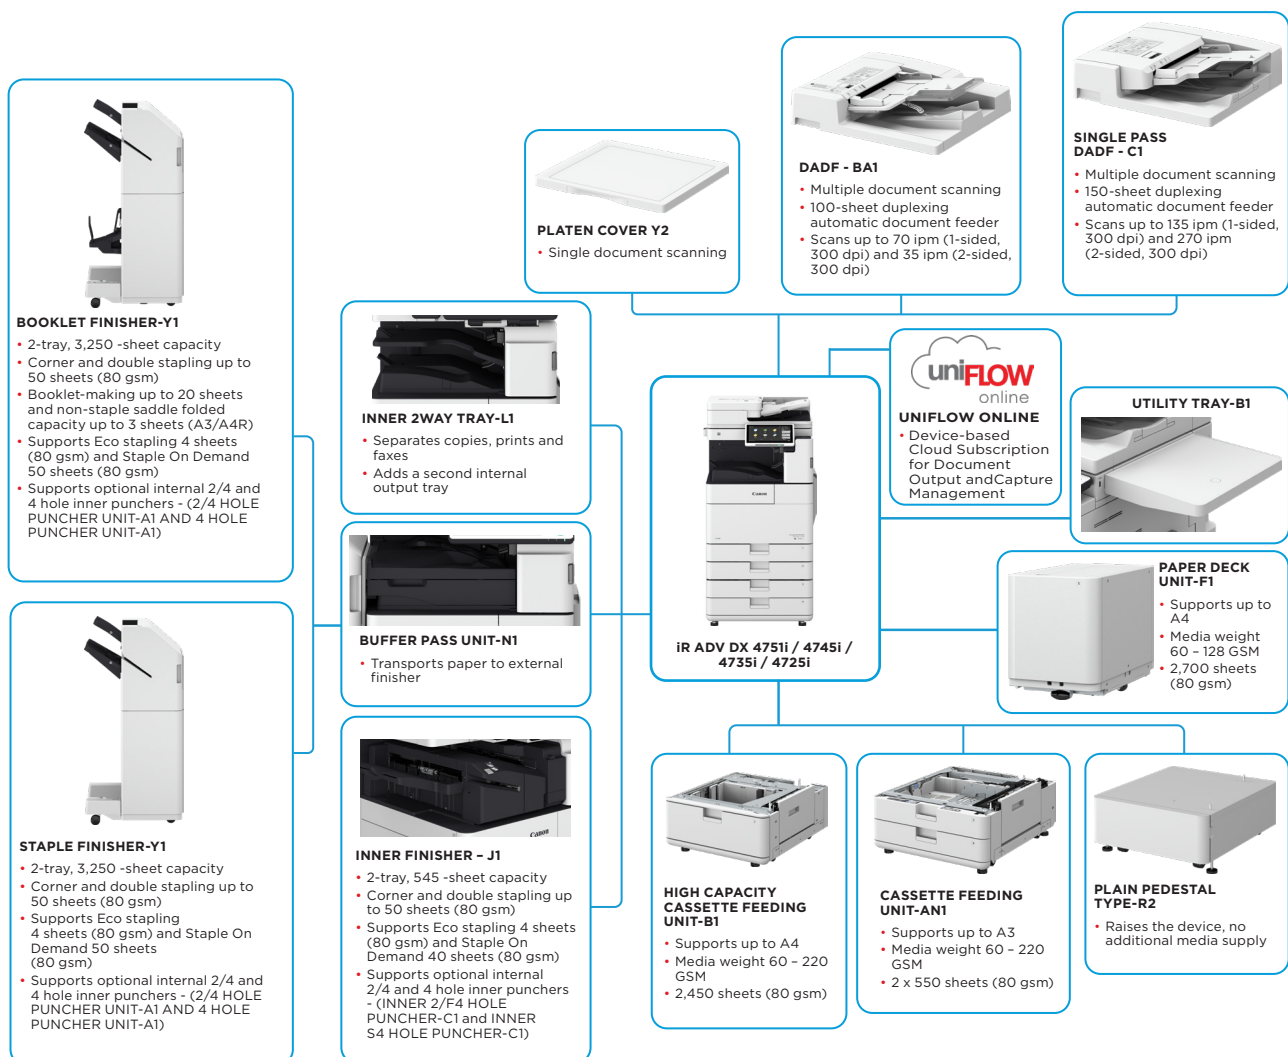

This flat configuration is for illustration purpose only. For a complete list of options and the exact compatibility relationships, please refer to the online [product configurator](#).

The Unified Firmware Platform (UFP) ensures that the latest feature upgrades and protection are available, for an enhanced user experience across the entire iR ADVANCE DX portfolio.

Canon

TECHNICAL SPECIFICATIONS

imageRUNNER ADVANCE DX 4700 Series

MAIN UNIT		Printing from mobile and cloud	AirPrint, Mopria Google Cloud Print, Canon PRINT Business, and uniFLOW Online A range of software and MEAP-based solutions are available to provide printing from mobile devices or internet-connecte d devices and cloud-based services depending on your requirements. Please contact your sales representative for further information.
Machine type	A3 Monochrome Laser Multifunctional		
Core functions	Print, Copy, Scan, Send, Store and Optional Fax		
Processor	1.75GHz Dual Core Processor		
Control Panel	Standard: 10.1" TFT LCD WSVGA Color Touch panel		
Memory	Standard: 3.0 GB RAM		
Hard Disk drive	Standard*: 320 GB (available disk space: 250 GB), Optional: 250GB, 1TB * A different initial HDD may be used.	Fonts	PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT J/K/S/T ^{*1} (Japanese, Korean, Simplified and Traditional Chinese) , Barcode fonts ^{*2} PS fonts: 136 Roman ^{*1} Optional PCL International Font Set-A1 is required. ^{**} Optional Barcode Printing Kit-D1 is required.
Mirroring Hard Disk Drive	Optional		
Interface Connection	NETWORK Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN(IEEE 802.11 b/g/n) Optional: NFC, Bluetooth Low Energy OTHERS Standard: USB 2.0(Host) x1, USB 3.0(Host) x1, USB 2.0(Device) x1 Optional: Serial Interface, Copy Control Interface	Print Features	Secured Print, Secure Watermark, Header/Footer, Page Layout, Two-sided Printing, Mixed Paper Sizes/ Orientations, Front/Back Covers, Toner Reduction, Poster Printing, Forced hold printing, Print Date, Scheduled Printing, Printing Using a Virtual Printer
Paper Supply Capacity (A4, 80gsm)	Standard: 1,200 sheets 100-sheet Multi-purpose tray x 1 550-sheet cassette x 2 Maximum: 6,350 sheets (with High Capacity Cassette Feeding Unit-B1 and Paper Deck Unit-F1)	Operating System	UFR!l: Windows* 7/8.1/10/Server 2008/Server 2008 R2/ Server 2012/Serve 2012 R2/Server 2016/Server 2019, Mac OS X (10.10 or later) PCL: Windows* 7/8.1/10/Server 2008/Server 2008 R2/ Server 2012/Server 2012 R2/Server 2016/Server 2019 PS: Windows* 7/8.1/10/Server 2008/Server 2008 R2/Server 2012/Server 2012 R2/Server 2016/Server 2019, Mac OS X (10.10 or later) PPD: Windows* 7/8.1/10, Mac OS X (10.9 or later) McAfee Embedded Control Software As of July,2019.
Paper output capacity (A4, 80gsm)	Standard: 250 Sheets Maximum: 3,350 Sheets (with Buffer Pass-N1 + Staple Finisher-Y1 or Booklet Finisher-Y1)		
Finishing capabilities	Standard: Collate, Group With options : Collate, Group, Offset, Staple, Saddle Stitch, Hole Punch, Eco Staple, Staple On Demand	COPY SPECIFICATIONS	
Supported media types	Multi-purpose tray: Thin, Plain, Heavy, Color, Recycled, Pre-punched, Transparency, Tracing, Label, Bond, Envelope Paper Cassette (Upper/Lower): Thin, Plain, Heavy, Color, Recycled, Pre-punched	Copy Speed	iR-ADV DX 4751i: Up to 51ppm (A4), Up to 37ppm (A4R), Up to 25ppm (A3), Up to 20 ppm (A5R) iR-ADV DX 4745i: Up to 45ppm (A4), Up to 32ppm (A4R), Up to 22ppm (A3),Up to 20ppm (A5R) iR-ADV DX 4735i: Up to 35ppm (A4), Up to 32ppm (A4R), Up to 22ppm (A3), Up to 20ppm (A5R) iR-ADV DX 4725i: Up to 25ppm (A4), Up to 17ppm (A4R), Up to 15ppm (A3), Up to 17ppm (A5R)
Supported media sizes	Multi-purpose tray: Standard size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom Size: 98.0 x 148.0 mm to 297.0 x 431.8 mm Free Size: 98.0 x 148.0 mm to 297.0 x 431.8 mm Envelope: COM10 No.10, Monarch, DL, ISO-C5 Custom size envelope: 98.0 x 148.0mm to 297.0 x 431.8mm Upper Cassette: Standard size: A4, A4R, A5R, B4, B5, B5R Custom size: 139.7 x 182.0 mm to 297.0 x 390.0 mm Lower Cassette: Standard size: A3, A4, A4R, A5R, B4, B5, B5R Custom size: 139.7 x 182.0 mm to 297.0 x 431.8 mm Envelope*: COM10 No.10, Monarch, DL, ISO-C5 * Envelope Feeder Attachment-D1 is required.	First-Copy-Out Time (A4)	iR-ADV DX 4751i: Approx. 3.7 seconds or less iR-ADV DX 4745i: Approx. 3.8 seconds or less iR-ADV DX 4735i: Approx. 3.8 seconds or less iR-ADV DX 4725i: Approx. 5.2 seconds or less
Supported media weights	Multi-purpose tray: 52 to 220 gsm *Thin (52 to 59gsm): vertical grain paper feed only Paper Cassettes (Upper/Lower): 60 to 220 gsm Duplex: 60 to 105 gsm	Copy resolution (dpi)	600 x 600
Warm-up Time	Quick startup mode: 4 seconds or less* *Time from device power-on to when the copy icon appears and is enabled to operate on the touch panel display. From Sleep Mode: 10 Seconds or Less From Power On: 24 seconds or less* *Time from device power-on, until copy ready (not print reservation)	Multiple Copies	Up to 9,999 copies
Dimensions (W x D x H)	With Platen Cover-Y2: 608 x 713 x 822 mm With Single Pass DADF-C1 : 608 x 722 x 932 mm With DADF-BA1 : 608 x 719 x 926 mm	Copy Density	Automatic or Manual (9 Levels)
Installation Space(W x D)	Basic: 1,116 x 1,160 mm (with Platen Cover Type Y2 + Multi-purpose tray open/extension tray extended + Paper Cassette open) 1,116 x 1,169 mm (with Single Pass DADF-C1 + Multi-purpose tray open/extension tray extended + Paper Cassette open) 1,116 x 1,166 mm (with DADF-BA1 + Multi-purpose tray open/extension tray extended + Paper Cassette open) Fully Configured: 1,811 x 1,169 mm (with Single Pass DADF-C1 + Paper Deck Unit-F1 + Booklet Finisher-Y1 with extension tray extended and Saddle unit drawn) 1,811 x 1,166 mm (with DADF-BA1 + Paper Deck Unit F1 + Booklet Finisher-Y1 with extension tray extended and Saddle unit drawn)	Magnification	Variable zoom: 25% - 400% (1% Increments) Preset reduction/enlargement: 25%, 50%, 70%, 100%(1:1), 141%, 200%, 400%
Weight	With Platen Cover Y2: Approx. 75.0 kg including toner With Single Pass DADF-C1 : Approx. 87.9 kg including toner With DADF-BA1 : Approx. 81.4 kg including toner	Copy Features	Preset R/E Ratios by Area, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Book to Two Pages, Two-sided Original, Job Build, N on 1, Add Cover, Insert Sheets, Different Size Originals, Page Numbering, Copy Set Numbering, Sharpness, Erase Frame, Secure Watermark, Print Date, Gutter, Print & Check, Negative/Positive, Repeat Images, Merge Job Blocks, Mirror Image, Store in Mail Box, Superimpose Image, Copy ID Card, Skip Blank Pages, Free Size Original, Reserved copy, Copy Sample
PRINT SPECIFICATIONS		SCAN SPECIFICATIONS	
Print Speed	iR-ADV DX 4751i: Up to 51ppm (A4), Up to 37ppm (A4R), Up to 25ppm (A3), Up to 20 ppm (A5R) iR-ADV DX 4745i: Up to 45ppm (A4), Up to 32ppm (A4R), Up to 22ppm (A3),Up to 20ppm (A5R) iR-ADV DX 4735i: Up to 35ppm (A4), Up to 32ppm (A4R), Up to 22ppm (A3), Up to 20ppm (A5R) iR-ADV DX 4725i: Up to 25ppm (A4), Up to 17ppm (A4R), Up to 15ppm (A3), Up to 17ppm (A5R)	Selectable type	Single Pass DADF-C1* or DADF-BA1 [2-sided to 2-sided (Automatic with DADF)] * Detect Feeder Multi Sheet Feed is supported. DADF: Duplexing Automatic Document Feeder Single Pass DADF-C1: up to 200 sheets DADF-BA1: up to 100 sheets
Print Resolution (dpi)	1,200x1,200	Document Feeder Paper Capacity (80 gsm)	Platen: Sheet, Book, and 3-Dimensional objects Document Feeder media weight: Single Pass DADF-C1* : 1-sided scanning: 38 to 220 gsm 2-sided scanning: 38 to 220 gsm *An acceptable weights of A6R or smaller is 50 to 220gsm.
Page description languages	Standard: UFR II, PCL6, Optional: Adobe®PostScript®3™	Acceptable originals and weights	DADF-BA1 : 1-sided scanning: 38 to 128 gsm (BW), 64 to 128 gsm (CL) 2-sided scanning: 50 to 128 gsm (BW), 64 to 128 gsm (CL)
Direct Print	Supported file types: TIFF, JPEG, PDF, EPS, and XPS	Supported media sizes	Platen: max. scanning size up to 297.0 x 431.8 mm Document Feeder media size: Single Pass DADF-C1: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, B6R, Custom size: 70.0 x 139.7 mm to 304.8 x 431.8 mm DADF-BA1: A3, A4, A4R, A5, A5R, B4, B5, B5R, B6, Custom size: 139.7 x 128 mm to 297.0 x 431.8 mm
		Scan Speed (ipm: BW/CL; A4)	Single Pass DADF-C1: 1-sided Scanning: 135/135 (300 x 300 dpi, send), 80/80 (600 x 600 dpi, copy) 2-sided Scanning: 270/270 (300 x 300 dpi, send), 160/90 (600 x 600 dpi, copy) DADF-BA1: 1-sided Scanning: 70/70 (300 x 300 dpi, send), 51/51 (600 x 600 dpi, copy) 2-sided Scanning: 35/35 (300 x 300 dpi, send), 25.5/25.5 (600 x 600 dpi, copy)



TECHNICAL SPECIFICATIONS

imageRUNNER ADVANCE DX 4700 Series

Scan Resolution (dpi)	Scan for Copy: 600 x 600 Scan for Send: (Push) 600 x 600 (SMB/FTP/WebDAV/IFAX), (Pull) 600 x 600 Scan for Fax: 600 x 600	Network Security	TLS 1.3, IPsec, IEEE802.1X authentication, SNMP V3.0, Firewall Functionality (IP/MAC Address Filtering), Dual Network Support (Wired LAN/Wireless LAN, Wired LAN/Wired LAN), Disabling Unused Functions (Enabling/Disabling Protocols/Applications, Enabling/Disabling Remote UI, Enabling/Disabling USB Interface), Communication Line Separation (G3 FAX, USB Port, Advanced Space, Scan and Send -Virus Concerns for E-mail Reception)
Pull Scan Specifications	Color Network ScanGear2. For both TWAIN and WIA Supported OS: Windows®7/8.1/10/Server2008/Server2008 R2/Server2012/Server2012 R2/Server 2016	Device Security	Protecting HDD Data (HDD Data Encryption (FIPS140-2 Validated), HDD Data Overwrite Erase, HDD Lock), Standard HDD Initialize, Trusted Platform Module (TPM), Job Log Conceal Function, Protecting MFD Software Integrity, Checking MFD Software Integrity (Verify System at Startup, Runtime Intrusion Detection), IEEE2600.2 (Common Criteria Certification) (TBD)
Scan Method	Push Scan, Pull Scan, Scan to Box, Scan to Advanced Space, Scan to Network, Scan to USB Memory Key, Scan to Mobile device, Scan to cloud (uniFLOW)	Device Management and Auditing	Administrator Password, Digital Certificate And Key Management, Audit Log, Cooperating with External Security Audit System (Security Information and Event Management), Image Data Logging, Security Policy Setting
SEND SPECIFICATIONS		ENVIRONMENTAL SPECIFICATIONS	
Destination	Standard: E-mail/Internet FAX (SMTP), SMB3.0, FTP, WebDAV, Mail Box Optional: Super G3 FAX, IP Fax	Operating Environment	Temperature: 10 to 30 °C Humidity: 20 to 80 % RH (Relative Humidity)
Address Book	LDAP (2,000)/Local(1,600)/Speed dial(200)	Power source	220-240V, 50-60Hz, 5.6A
Send resolution (dpi)	Push: up to 600 x 600 Pull: up to 600 x 600	Power consumption	Maximum: Approx. 1,500 W Copying (with DADF continuous scan): iR-ADV DX 4751i: 990 W* ¹ iR-ADV DX 4745i: 975 W* ¹ iR-ADV DX 4735i: 875 W* ¹ iR-ADV DX 4725i: 653 W* ¹
Communication protocol	File: FTP(TCP/IP), SMB3.0 (TCP/IP), WebDAV E-mail/I-Fax: SMTP, POP3		Standby: Approx. 38 W* ¹ Sleep mode: Approx. 0.9 W* ² ^{*1} Reference value: measured one unit ^{*2} 0.9 sleep mode is not available in all circumstances due to certain settings.
File Format	Standard: TIFF, JPEG, PDF (Compact, Searchable, Apply policy, Optimize for Web, PDF/A-1b, Trace & Smooth, Encrypted, Device Signature, User Signature), XPS (Compact, Searchable, Device Signature, User Signature), Office Open XML (PowerPoint, Word)		Typical Electricity Consumption (TEC)* : iR-ADV DX 4751i: 0.72 kWh iR-ADV DX 4745i: 0.63 kWh iR-ADV DX 4735i: 0.53 kWh iR-ADV DX 4725i: 0.35 kWh ^{*As per USA Energy Star 3.0}
Universal Send Features	Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Copy Ratio, Erase Frame, Job Build, Sender's Name (TTI), Delayed Send, Preview, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation, Skip Blank Pages	Noise levels	Sound Power Level (LWA,m)* Active (I-sided) iR-ADV DX 4751i: 6.7 B, Kv 0.3 B iR-ADV DX 4745i: 6.6 B, Kv 0.3 B iR-ADV DX 4735i: 6.5 B, Kv 0.3 B iR-ADV DX 4725i: 6.3 B, Kv 0.3 B ^{*Reference value: measured only one unit with ISO7779, described with ISO9296 (2017)}
FAX SPECIFICATIONS			Sound Pressure (LpAm) Bystander's position: Active(BW) (I-sided): iR-ADV DX 4751i: 54 dB* iR-ADV DX 4745i: 51 dB* iR-ADV DX 4735i: 51 dB* iR-ADV DX 4725i: 50 dB* Stand-by iR-ADV DX 4751i: 21 dB* iR-ADV DX 4745i: 21 dB* iR-ADV DX 4735i: 20 dB* iR-ADV DX 4725i: 20 dB* ^{*Reference value: Measured only one unit with ISO7779, described with ISO9296 (2017)}
Maximum Number of Connection Lines	2		
Modem Speed	Super G3: 33.6 kbps G3: 14.4 kbps		
Compression Method	MH, MR, MMR, JBIG		
Resolution (dpi)	400x400 (Ultra Fine), 200x400 (Super Fine), 200x200 (Fine), 200x100 (Normal)		
Sending/Receiving Size	Sending: A3, A4, A4R, A5*, A5R*, B4, B5*, B5R* ¹ Receiving: A3, A4, A4R, A5R, B4, B5, B5R ^{*1} Sent as A4 ^{*2} Sent as B4 short		
FAX memory	Up to 30,000 pages (2,000 jobs)		
Speed dials	Max. 200		
Group dials/destinations	Max. 199 dials		
Sequential broadcast	Max. 256 addresses		
Memory backup	Yes		
Fax Features	Sender's Name (TTI), Selecting the Telephone Line (when sending fax), Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Interrupt Transmission, Sequential Broadcasting, Password/Subaddress Sending, Confidential Mailbox, 2 on 1 Log		
STORE SPECIFICATIONS		Standards	
Mail Box (Number supported)	100 User Inboxes, 1 Memory RX Inbox, 50 Confidential Fax Inboxes Maximum 30,000 Pages (2,000 jobs) Stored	CONSUMABLES	
Advanced Space	Communication Protocol: SMB or WebDAV Supported Client PC: Windows® 8.1/10 Concurrent Connections (Max.): SMB:64, WebDAV:3	Toner Cartridges	C-EXV 53 TONER BK
Advanced Space available disc space	Standard:16 GB (With option: max. 480GB)	Toner (Estimated Yield @ 6% Coverage)	C-EXV 53 TONER BK: 42,100 pages
Advanced Space Features	Authentication for Advanced Space Log-in, Sort Function, Printing a PDF File with a Password, imageWARE Secure Audit Manager Support, Search, File Preview, Authentication Management, Open to public, URI TX, Backup/Restore	SOFTWARE AND PRINTER MANAGEMENT	
SECURITY SPECIFICATIONS		Tracking and reporting	Universal Login Manager (ULM) uniFLOW Online Express* ^{*For more information, please refer to uniFLOW Online Express/uniFLOW Online Technical Datasheets}
Authentication and Access Control	Standard: User Authentication (Picture Login, Picture and PIN Login, Card Login, Username and Password Login, Function Level Login, Mobile Login), Department ID Authentication (Department ID and PIN Login, Function Level Login), uniFLOW Online Express (PIN Login, Picture Login, Picture and PIN Login, Card Login, Card and PIN Login, Username and Password Login, Department ID and PIN Login, Function Level Login), Access Management System (Access Control)	Remote management tools	iW Management Console eMaintenance Content Delivery System
Document Security	Print Security (Secure Print, Encrypted Secure Print, Forced Hold Printing, uniFLOW Secure Print*), Receive Data Security (Confidential Fax Inbox Forwarding Received Documents Automatically), Scan Security (Encrypted PDF, Device Signature PDF/XPS, User Signature PDF/XPS, Adobe LiveCycle® Rights Management ES2.5 Integration), BOX Security (Mail Box Password Protected, Advanced Box Space Access Control), Send Data Security (Setting for requesting password input per transmission, Restricted E-mail/File send functions, Confirming FAX number, Allow/Restrict Fax Driver Transmissions, Allow/Restrict Sending from History, S/MIME Support), Scan Lock (QR code), Document Tracking (Secure Watermark) ^{*1 Requires uniFLOW Online / uniFLOW}	Scanning software	Network ScanGear
		Optimisation tools	Canon Driver Configuration Tool NetSpot Device Installer
		Platform	MEAP (Multifunctional Embedded Application Platform)
		Document Administration	Kofax Power PDF



TECHNICAL SPECIFICATIONS

imageRUNNER ADVANCE DX 4700 Series

PAPER SUPPLY OPTIONS

Cassette Feeding Unit-AN1

Paper Capacity: 550 sheets x 2 (80 gsm)
Paper Type: Thin, Plain, Heavy, Color, Recycled, Pre-punched
Paper Size: A3, A4, A4R, A5R, B4, B5R, B5,
Custom size: 139.7 x 182.0mm to 297.0 x 390.0 mm
Paper Weight: 60 to 220 gsm
Power Source: From the Main Unit
Dimensions (W x D x H): 565 x 650 x 248 mm
(attached to the main unit)
Weight: Approx. 23.5 kg
Paper Capacity: 2,450 sheets (80 gsm)
Paper Type: Thin, Plain, Heavy, Color, Recycled, Pre-punched
Paper Size: A4
Paper Weight: 60 to 220 gsm
Power Source: From the Main Unit
Dimensions (W x D x H): 565 x 650 x 248 mm
(attached to the main unit)
Weight: Approx. 28.0 kg

High Capacity Cassette Feeding Unit-B1

Paper Deck Unit-F1

Tray Capacity: 2,700 sheets (80 gsm)
Paper Type: Thin, Plain, Heavy, Color, Recycled, Pre-punched
Paper Size: A4, B5
Paper Weight: 60 to 128 gsm
Power Source: From the Main Unit
Dimensions (W x D x H): 344 x 630 x 440 mm (attached to
the main unit)
Weight: Approx. 31.0 kg

OUTPUT OPTIONS*

Inner 2Way Tray-L1

*Paper capacity may vary with different of paper type/size.

Tray Capacity (with 80 gsm paper)
Upper tray: A4, A5, A5R, A6R, B5; 100 sheets
A3, A4R, B4, B5R: 50 Sheets
Lower tray: A4, B5: 250 sheets
A3, A4R, A5, A5R, A6R, B4, B5R: 100 sheets
Paper Weight: 52 to 220 gsm
Dimensions (W x D x H): 426 x 413 x 109 mm
Weight: 0.6 kg

Inner Finisher-J1

Tray Capacity (with 80 gsm paper)
Upper Tray: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R: 45 sheets
Lower Tray: A4, A5R, B5: approx. 500 sheets,
A3, A4R, B4, B5R: approx. 250 sheets
Envelope: 10 sheets
Paper Weight: 52 to 220 gsm
Staple Position: Corner, Double
Staple Capacity:
A4, B5: 50 sheets (52 to 90 gsm)
A3, A4R, B4: 30 sheets (52 to 90 gsm)
Eco Staple:
A3, A4, B4, B5: 5 sheets (52 to 64 gsm)
4 sheets (65 to 81.4 gsm)
3 sheets (81.5 to 105 gsm)
Staple On Demand: approx. 40 sheets (80 gsm)
Dimensions (W x D x H): 604 x 525 x 205 mm
(when the extension tray is extended)
Weight: Approx. 7.3 kg

Staple Finisher-Y1

(Requires Buffer Pass Unit-N1)
Tray Capacity (with 80 gsm paper):
Upper Tray: A4, A5, A5R, A6R, B5: 250 sheets,
A3, A4R, B4, B5R: 125 sheets,
Lower Tray: A4, A5, A5R, B5: 3,000 sheets,
A3, A4R B4, B5R: 1,500 sheets,
A6R: up to 250 sheets
Envelope: No.10 COM10, DL, ISO-C5: 100 sheets,
Monarch: 30 sheets
Paper Weight: 52 to 220 gsm
Staple Position: Corner, Double
Staple Capacity:
A4, B5: 50 sheets (52 to 90 gsm)
A3, A4R, B4: 30 sheets (52 to 90 gsm)
Eco Staple:
A3, A4: 5 sheets (52 to 64 gsm)
4 sheets (65 to 81.4 gsm)
3 sheets (82 to 105 gsm)
Staple On Demand: 50 sheets (52 to 90 gsm)
Power Supply: from the main unit
Dimensions (W x D x H): 637 x 623 x 1,142 mm
(when the extension tray is extended)
Weight: Approx. 31 kg

Booklet Finisher-Y1

(Requires Buffer Pass Unit-N1)
(Includes the above Staple Finisher-Y1 basic staple specifications)
Saddle Stitch paper size: A3, A4R, B4
Saddle Stitch Staple Capacity: 20 sheets x 10 sets (52 to 81.4 gsm)
(including 1 cover sheet)
Non Staple Folded Bunch Capacity: up to 3 sheets (52 to 105 gsm)
Power Supply: from the main unit
Dimensions (W x D x H): 637 mm x 623 mm x 1,142 mm
(when the extension tray is extended)
Weight: Approx. 57 kg

Inner 2/F4 Hole Puncher-C1

(Requires the Inner Finisher-J1)
Two or Four Holes
Acceptable Punch Paper Weight: 52 to 220 gsm
Acceptable Punch Paper Size:
Two holes A3, A4, A4R, B4, B5, B5R
Four holes A3, A4
Power Source: from the Finisher

Inner S4 Hole Puncher-C1

(Requires the Inner Finisher-J1)
Four Holes
Acceptable Punch Paper Weight: 52 to 220 gsm
Acceptable Punch Paper Size: Four holes A3, A4, A4R, B4, B5, B5R
Power Source: from the Finisher

2/4 Hole Puncher Unit-A1

(Requires either the Staple Finisher-Y1 or Booklet Finisher-Y1)
Two or Four Holes
Acceptable Punch Paper Weight: 52 to 220 gsm
Acceptable Punch Paper Size:
Two holes A3, A4, A4R, A5, B4, B5, B5R
Four holes A3, A4
Power Source: from the Finisher

4 Hole Puncher Unit-A1

(Requires either the Staple Finisher-Y1 or Booklet Finisher-Y1)
Four Holes
Acceptable Punch Paper Weight: 52 to 220 gsm
Acceptable Punch Paper Size: Four holes A3, A4, A4R, A5, B4,
B5, B5R
Power Source: from the Finisher

HARDWARE ACCESSORIES

Card Readers

Various card readers available e.g. MiCard Plus.
Please contact local Canon Office for more details.
Copy Card Reader-F1
Copy Card Reader Attachment-B7

Others

Platen Cover-Y2
Utility Tray-B1
Envelope Feeder Attachment-D1
Numeric Keypad-A1

SECURITY OPTIONS

Data Security

HDD Mirroring Kit-J1
2.5inch/250GB HDD-N1
2.5inch/1TB HDD-P1

SYSTEM AND CONTROLLER OPTIONS

Print Accessories

PCL International Font Set-A1
PS Printer Kit-BG1

Barcode Printing

Barcode Printing Kit-D1

System Accessories

Copy Control Interface Kit-A1
Serial Interface Kit-K3
Connection Kit-A2 for Bluetooth LE
NFC Kit-E1

Fax Accessories

Super G3 FAX Board-BF1
Super G3 2nd Line Fax Board-BF1
Remote Fax Kit-A1
IP FAX Expansion Kit-B1

OTHER OPTIONS

Accessibility Accessories

ADF Access Handle-A1
Voice Guidance Kit-G1
Voice Operation Kit-D1

Staple Cartridge

Staple-P1
Staple Cartridge-Y1

Software & Solutions



Certifications and compatibility



Canon

Canon Inc.
canon.com

Canon Europe
canon-europe.com

English edition
© Canon Europa N.V., 2020