



imageRUNNER ADVANCE DX C5700 Series

CONNECT SECURELY, TRANSFORM DIGITALLY

INNOVATIVE SCAN TECHNOLOGY AND SMART SOFTWARE WORK HAND-IN-HAND

The future of business is digital. Canon imageRUNNER ADVANCE DX is a new generation of smart multifunction devices, designed to support and accelerate every step of your digital transformation. Built with Canon's imageRUNNER ADVANCE DNA, state-of-the-art technology and software work hand-in-hand to digitise, automate and optimise content-centric workflows.

Canon's imageRUNNER ADVANCE DX C5700 Series offers smart and secure A3 colour multifunction devices that maximise workflow efficiency, without compromising on document security. New scanning technology ensures high-speed and pinpoint accuracy, while uniFLOW Online Express (uFOE) - which comes as standard - delivers cloud connectivity and basic print management.



**CLOUD
CONNECTIVITY**



SECURITY  **McAfee
PROTECTED**



PRODUCTIVITY



SUSTAINABILITY



Canon uniFLOW Online
Outstanding Cloud Output-Management Solution



New to the Line

Canon

imageRUNNER ADVANCE DX C5700 Series

CLOUD CONNECTIVITY

- Scan and print documents from any location with enhanced cloud connectivity, offered with re-usable print formats for ease of use
- Cloud-based software-as-standard uniFLOW Online Express (uFOE) offers a single integrated solution to increase device security and simplify print management
- Canon's MEAP platform optimises processes by integrating with document capture and output management solutions and various applications such as uniFLOW Online*, AirPrint, Mopria, Google Cloud Print and Canon PRINT Business

SECURITY

- Ensure information confidentiality and security across the network with IPsec and firewall functionality
- Set up device authentication, two-factor authentication and device function restrictions for both device and cloud-based security measures
- Encrypted PDF scanning ensures document security during scanning process

- Upgrade to uniFLOW Online* for enhanced secure printing, mobile printing, and guest printing from any device
- Combination of Verify system at start up and McAfee Embedded Control Software ensures device functionality is never compromised from the tampering of firmware and applications, all in real-time

PRODUCTIVITY

- Fast, high-quality scanning at 270 ipm (A4) with expansive connectivity options
- Automated scan, store and search workflows boost efficiency and reduce human error
- Device management tools such as iWMC provide centralised control over the device fleet and print management
- Automatic removal of blank pages when scanning minimises process times
- Reusable formats, automatic file names from barcode data, Office format conversions, cloud and device OCR with IRIS enable easy handling and fast document processing











SUSTAINABILITY

- Edit print settings at device-level for accurate scan output
- Quiet operation and reduced paper hitting sounds during scanning is enabled thanks to technologies such as digital registration and a smooth ADF internal structure
- Automated and digitised processes minimise paper usage for a paperless office
- Reduce waste with high-quality scanning, including digital deskewing and advanced stain-resistant glass

*uniFLOW Online is available as a Device Based Cloud Subscription for Document Output and Capture Management. Based on business needs, users can upgrade to uniFLOW Online to unlock a range of advanced benefits, including: Increased security with user authentication methods. Personalised workflows to enhance productivity. Reduced wastage by releasing jobs at the device. An intuitive cloud dashboard to leverage real-time data. Greater control over access and usage to reduce print costs.

NOTE - Certain features are only enabled with the combination of iR ADV DX and uniFLOW Online

QUICK FACTS

-  **Format:** Colour A3
-  **Paper Supply Capacity (Max):** 6,350 sheets
-  **Warm-up time:** 4 seconds or less
-  **Finishing Capabilities:** Collate, Group, Offset, Staple, Saddle Stitch, Hole Punch, Eco Staple, Staple On Demand
-  **Supported File Types:** PDF, EPS, TIFF, JPEG, and XPS
-  **Optional:** EFI Fiery Embedded
-  **Print speed:** 35-60 ppm (A4)
-  **Scan speed:** 270 ipm (A4)
-  **Print Languages:** UFR II, PCL6, Adobe® PostScript 3™
-  **Print Resolution:** 1,200 x 1,200
- Enhanced cloud connectivity enables collaborative document access from anywhere, with re-usable formats for easy handling
- Accurate, high-speed scanning is facilitated by Canon's innovative new paper feeding mechanism and stain-resistant glass
- Efficient workflow automation means documents are intuitively scanned, searched and stored with applications including OneDrive, SharePoint, Concur and Dropbox
- McAfee Embedded Control software alongside with other security features offer complete peace of mind and a 360° protection covering: document, network and device
- Simplified print management is enabled with centrally-managed print settings and device usage analysis, provided through native uniFLOW Online Express (uFOE)
- Quiet ADF operation, low energy consumption and reduced emissions lower environmental impacts

TAILORED SOLUTIONS TO MEET EVERY CHALLENGE

CORE

Perform routine office operations safely and with ease, with minimum hardware, embedded software including uFOE and services offering complete device maintenance and support.



HARDWARE



SERVICES



SOFTWARE

ENHANCED

Boost performance with enhancements such as finishing options and security add-ons e.g. Data Removal Service. Choose solutions to expand cloud capabilities with uniFLOW Online including advanced scanning directly with your Google account.

BESPOKE

Choose tailored solutions for any business need by removing print management burdens. Consult with Canon experts to manage your extensive requirements, with bespoke solutions and Managed Services options.

Canon Inc.
canon.com

Canon Europe
canon-europe.com

English edition
© Canon Europa N.V., 2020

imageRUNNER ADVANCE DX C5700 Series

STREAMLINE BUSINESS EFFICIENCY WITH SMART, COLOUR A3 MULTIFUNCTION DEVICES




Canon uniFLOW Online
Outstanding Cloud Output Management Solution



New to the Line

MAIN CONFIGURATION OPTIONS

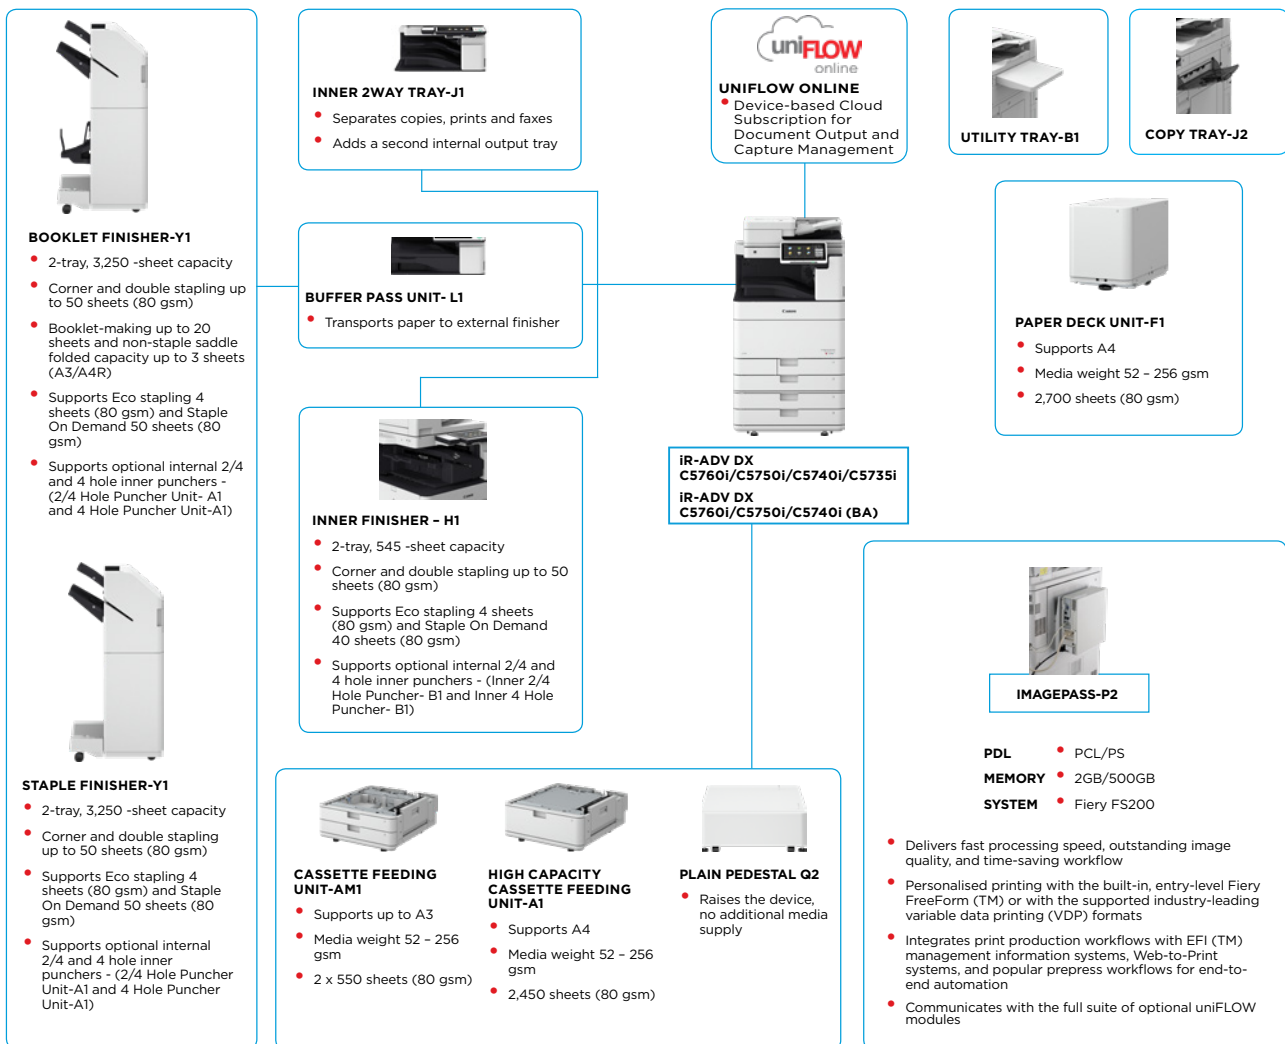

This flat configuration is for illustration purpose only. For a complete list of options and the exact compatibility relationships, please refer to the [online product configurator](#).

The Unified Firmware Platform (UFP) ensures that the latest feature upgrades and protection are available, for an enhanced user experience across the entire iR ADVANCE DX portfolio.

TECHNICAL SPECIFICATIONS

imageRUNNER ADVANCE DX C5700 Series

MAIN UNIT		Direct Print	Supported file types: PDF, EPS, TIFF/JPEG, and XPS
Machine type	A3 Color Laser Multifunctional	Printing from mobile and cloud	AirPrint, Mopria, Google Cloud Print, Canon PRINT Business and uniFLOW Online
Core functions	Print, Copy, Scan, Send, Store and Optional Fax		A range of software and MEAP-based solutions are available to provide printing from mobile devices or internet-connected devices and cloud-based services depending on your requirements. Please contact your sales representative for further information.
Processor	1.75GHz Dual Core Processor		PS fonts: 136 Roman PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andale Mono WT J/K/S/T*1 (Japanese, Korean, Simplified and Traditional Chinese), Barcode fonts*2
Control Panel	10.1" TFT LCD WSVGA Color Touch panel	Fonts	*1 Optional PCL International Font Set-A1 is required. *2 Optional Barcode Printing Kit-D1 is required.
Memory	Standard: 4.0GB RAM		Secured Print, Secure Watermark, Header/Footer, Page Layout, Two-sided Printing, Mixed Paper Sizes/Orientations, Front/Back Covers, Toner Reduction, Poster Printing, Forced Hold printing, Print Date, Scheduled Printing, Printing Using a Virtual Printer
Hard Disk drive	Standard*: 320GB (available disk space: 250GB), Optional: 250GB, 1TB *A different initial HDD may be used.	Print Features	Operating System UFR II: Windows® 7/8.1/10/Server2008/Server2008 R2/Server2012/Server2012 R2/Server2016/Server2019, Mac OS X(10.10 or later) PCL: Windows® 7/8.1/10/Server2008/Server2008 R2/Server2012/Server2012 R2/Server2016/Server2019 PS: Windows® 7/8.1/10/Server2008/Server2008 R2/Server2012/Server2012 R2/Server2016/Server2019, Mac OS X(10.10 or later) PPD: Windows® 7/8.1/10, Mac OS X(10.9 or later) McAfee Embedded Control Software As of Feb 2020
Mirroring Hard Disk Drive	Optional		
Interface Connection	NETWORK Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE 802.11 b/g/n); Optional: NFC, Bluetooth Low Energy OTHERS Standard: USB 2.0 (Host) x1, USB 3.0 (Host) x1, USB 2.0 (Device) x1; Optional: Serial Interface, Copy Control Interface	Operating System	
Paper Supply Capacity (A4, 80gsm)	Standard: 1,200 sheets 100-sheet multi-purpose tray x 1 550-sheet cassettes x 2 Maximum: 6,350 sheets (with High Capacity Cassette Feeding Unit-A1 + Paper Deck Unit-F1)	COPY SPECIFICATIONS	
Paper output capacity (A4, 80gsm)	Standard: 250 sheets Maximum: 3,450 Sheets (with Staple Finisher-Y1 or Booklet Finisher-Y1 and Copy Tray-J2)	Copy Speed (BW/CL)	iR-ADV DX C5760i up to 60 ppm (A4, A5, A5R, A6R), up to 32 ppm (A3), up to 36 ppm (A4R) iR-ADV DX C5750i up to 50 ppm (A4, A5, A5R, A6R), up to 27 ppm (A3), up to 30 ppm (A4R) iR-ADV DX C5740i up to 40 ppm (A4, A5, A5R, A6R), up to 22 ppm (A3), up to 24 ppm (A4R) iR-ADV DX C5735i up to 35 ppm (A4, A5, A5R, A6R), up to 18 ppm (A3), up to 23 ppm (A4R)
Finishing capabilities	Standard: Collate, Group With Options: Collate, Group, Offset, Staple, Saddle Stitch, Hole Punch, Eco Staple, Staple On Demand	First-Copy-Out Time (A4, BW/CL)	iR-ADV DX C5760i: Approx. 2.9/4.5 seconds or less iR-ADV DX C5750i: Approx. 3.5/5.2 seconds or less iR-ADV DX C5740i: Approx. 4.1/6.1 seconds or less iR-ADV C5735i: Approx. 4.9/7.4 seconds or less
Supported Media Types	Multi-purpose tray: Thin, Plain, Recycled, Color, Heavy, Coated, Tracing, Bond, Transparency, Label, Pre-punched, Letterhead, Tab, Envelope Paper Cassette (Upper/Lower): Thin, Plain, Recycled, Color, Heavy, Bond, Transparency, Pre-punched, Letterhead, Envelope* *Envelope Feeder Attachment (standard) is required.	Copy resolution (dpi)	600 x 600
Supported Media Sizes	Multi-purpose tray: Standard size: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom size: 98.0 x 139.7 mm to 320.0 x 457.2 mm Free Size: 98.0 x 139.7 mm to 320.0 x 457.2 mm Envelopes: COM 10 No.10, Monarch, DL, ISO-C5 Envelope custom size: 98.0 x 98.4 mm to 320.0 x 457.2 mm Upper Cassette: Standard size: A4, A5, A5R, A6R, B5 Custom Size: 98.0 x 148.0 mm to 297.0 x 215.9 mm Envelopes: COM10 No.10, DL, ISO-C5 Lower Cassette: Standard size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom size: 98.0 x 182.0 mm to 304.8 x 457.2 mm Envelopes: COM10 No.10, Monarch, DL, ISO-C5	Multiple Copies	Up to 999 copies
Supported media weights	Multi-purpose tray: 52 to 300 gsm Paper Cassette (Upper/Lower): 52 to 256 gsm Duplex: 52 to 220 gsm	Copy Density	Automatic or Manual (9 Levels)
Warm-up Time	Quick Startup Mode: 4 Seconds or less* *Time from device power-on to when the copy icon appears and is enabled to operate on the touch panel display. From Sleep Mode: 10 Seconds or Less From Power On: 10 Seconds or less* *Time from device power-on, until copy ready (not print reservation).	Magnification	Variable zoom: 25% to 400% (1% Increments) Preset reduction/enlargement: 25%, 50%, 70%, 100%(1:1), 141%, 200%, 400%
Dimensions (W x D x H)	iR-ADV DX C5760i/C5750i/C5740i/C5735i: 620 x 722 x 937 mm iR-ADV DX C5760i/C5750i/C5740i (BA models): 620 x 860 x 937 mm	Copy Features	Preset R/E Ratios by Area, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Book to Two Pages, Two-sided Original, Job Build, N on 1, Add Cover, Insert Sheets, Different Size Originals, Page Numbering, Copy Set Numbering, Sharpness, Erase Frame, Secure Watermark, Print Date, Gutter, Print & Check, Negative/Positive, Repeat Images, Merge Job Blocks, Mirror Image, Store in Mail Box, Superimpose Image, Copy ID Card, Skip Blank Pages, Free Size Original, Color Mode, Reserved copy, Copy Sample
Installation Space(W x D)	iR-ADV DX C5760i/C5750i/C5740i/C5735i: Basic: 1,083 x 1,162 mm (Right Cover Open with Multi-purpose tray extended + Cassette Drawers Open) Fully Configured: 1,866 x 1,162 mm (Booklet Finisher-Y1 with the extension tray extended + Paper Deck Unit-F1 + Cassette Drawers open) iR-ADV DX C5760i/C5750i/C5740i (BA models): Basic: 1,083 x 1,300 mm (Right Cover Open with Multi-purpose tray extended + Cassette Drawers Open) Fully Configured: 1,866 x 1,300 mm (Booklet Finisher-Y1 with the extension tray extended + Paper Deck Unit-F1 + Cassette Drawers open)	SCAN SPECIFICATIONS	
Weight	iR-ADV DX C5760i/C5750i/C5740i/C5735i: Approx. 143 kg including toner [iR-ADV DX C5760i/C5750i/C5740i (BA models): Approx. 145 kg including toner]	Type	Single-pass Duplexing Automatic Document Feeder* [2-sided to 2-sided (Automatic)] * Detect Feeder Multi Sheet Feed is supported. up to 200 Sheets
PRINT SPECIFICATIONS		Document Feeder Paper Capacity (80 gsm)	Platen: Sheet, Book, and 3-Dimensional Objects Document Feeder media weight: 1-sided scanning: 38 to 220 gsm (BW, CL) 2-sided scanning: 38 to 220 gsm (BW, CL) *An acceptable weights of A6R or smaller is 50 to 220gsm.
Print Speed (BW/CL)	iR-ADV DX C5760i 60 ppm (A4), 32 ppm (A3), 36 ppm (A4R), 60/5 ppm (A5R), 60/5 ppm (A6R) iR-ADV DX C5750i 50 ppm (A4), 27 ppm (A3), 30 ppm (A4R), 50/4 ppm (A5R), 50/4 ppm (A6R) iR-ADV DX C5740i 40 ppm (A4) 22 ppm (A3), 24 ppm (A4R), 40/4 ppm (A5R), 40/4 ppm (A6R) iR-ADV DX C5735i 35 ppm (A4), 18 ppm (A3), 23 ppm (A4R), 35/4 ppm (A5R), 35/4 ppm (A6R)	Acceptable Originals and weights	Platen scanning size: up to 297.0 x 431.8 mm Document Feeder media size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, B6R Custom size: 70.0 x 139.7 mm to 304.8 x 431.8 mm
Print Resolution (dpi)	600 x 600, 1,200 x 1,200	Supported media sizes	1-sided Scanning: 135/135 (300 x 300 dpi, send), 80/80 (600 x 600 dpi, copy), 2-sided Scanning: 270/270 (300 x 300 dpi, send), 160/90 (600 x 600 dpi, copy) Scan for Copy: 600 x 600 Scan for Send: (Push) 600 x 600 (SMB/FTP/WebDAV/IFAX), (Pull) 600 x 600 Scan for Fax: 600 x 600
Page description languages	Standard: UFR II, PCL6, Adobe® PostScript®3™	Scan Speed (ipm: BW/CL; A4)	Scan Resolution (dpi) Full Scan Specifications
		Scan Resolution (dpi)	Color Network ScanGear2. For both TWAIN and WIA Supported OS: Windows® 7/8.1/10/Server2008/Server2008 R2/Server2012/Server2012 R2/Server 2016 Push Scan, Pull Scan, Scan to Box, Scan to Advanced Space, Scan to Network, Scan to USB Memory Key, Scan to Mobile devices, Scan to cloud (uniFLOW Online)
		Pull Scan Specifications	
		Scan Method	

TECHNICAL SPECIFICATIONS

imageRUNNER ADVANCE DX C5700 Series

SEND SPECIFICATIONS

Destination

Standard: E-mail/Internet FAX (SMTP) SMB3.0 FTP WebDAV Mail Box
Optional: Super G3 FAX, IP Fax

Address Book

LDAP (2,000)/Local (1,600)/Speed dial (200)

Send resolution (dpi)

Push: up to 600 x 600 Pull: up to 600 x 600

Communication protocol

File: FTP(TCP/IP), SMB3.0 (TCP/IP), WebDAV
E-mail/I-Fax: SMTP, POP3

File Format

Standard: TIFF, JPEG, PDF(Limited Color, Compact, Searchable, Apply policy, Optimize for Web, PDF/A-1b, Trace & Smooth, Encrypted, Device Signature, User Signature), XPS(Compact, Searchable, Device Signature, User Signature), Office Open XML (PowerPoint, Word)

Universal Send Features

Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Copy Ratio, Erase Frame, Job Build, Delayed Send, Preview, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation, Skip Blank Pages

FAX SPECIFICATIONS

Maximum Number of Connection Lines

(Optional)
2 (2nd line optional)

Modem Speed

Super G3: 33.6 kbps
G3: 14.4 kbps

Compression Method

MH, MR, MMR, JBIG

Resolution (dpi)

400 x 400 (Ultra Fine), 200 x 400 (Super Fine), 200 x 200 (Fine), 200 x 100 (Normal)

Sending/Receiving Size

Sending: A3, A4, A4R, A5¹, A5R¹, B4, B5², B5R¹
Receiving: A3, B4, A4, A4R, A5R, B5, B5R
¹Sent as A4
²Sent as B4 short

FAX memory

Up to 30,000 pages (2,000 jobs)

Speed dials

Max. 200

Group dials/destinations

Max. 199 dials

Sequential broadcast

Max. 256 addresses

Memory backup

Yes

Fax Features

Sender's Name (TTI), Selecting the Telephone Line (when sending fax), Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Interrupt Transmission, Sequential Broadcasting, Password/Subaddress Sending, Confidential Mailbox, 2 on 1 Log

STORE SPECIFICATIONS

Mail Box (Number supported)

1100 User Inboxes,
1 Memory RX Inbox,
50 Confidential Fax Inboxes
Maximum 10,000 Pages (2,000 jobs) Stored

Advanced Space

Communication Protocol: SMB or WebDAV
Supported Client PC: Windows[®] 8.1/10
Concurrent Connections (Max.): SMB:64, WebDAV:3

Advanced Space available disc space

Standard:16 GB (With option: max. 480GB)

Advanced Space Features:

Authentication for Advanced Space Log-in, Sort Function, Printing a PDF File with a Password, imageWARE Secure Audit Manager Support, Search, File Preview, Authentication Management, Open to public, URI TX, Backup/Restore

SECURITY SPECIFICATIONS

Authentication and Access Control

User Authentication (Picture Login, Picture and PIN Login, Card Login, Username and Password Login, Function Level Login, Mobile Login), Department ID Authentication (Department ID and PIN Login, Function Level Login), uniFLOW Online Express (PIN Login, Picture Login, Picture and PIN Login, Card Login, Card and PIN Login, Username and Password Login, Department ID and PIN Login, Function Level Login), Access Management System (Access Control)

Document Security

Print Security (Secure Print, Encrypted Secure Print, Forced Hold Printing, uniFLOW Secure Print¹), Receive Data Security (Confidential Fax Inbox Forwarding Received Documents Automatically), Scan Security (Encrypted PDF, Device Signature PDF/XPS, User Signature PDF/XPS, Adobe LiveCycle[®] Rights Management ES2.5 Integration), BOX Security (Mail Box Password Protected, Advanced Space Access Control), Send Data Security (Setting for requesting password input per transmission, Restricted E-mail/File send functions, Confirming FAX number, Allow/Restrict Fax Driver Transmissions, Allow/Restrict Sending from History, S/MIME Support), Document Tracking (Secure Watermark)
¹ Requires uniFLOW Online / uniFLOW

Network Security

TLS 1.3, IPsec, IEEE802.1X authentication, SNMP V3.0, Firewall Functionality (IP/MAC Address Filtering), Dual Network Support (Wired LAN/Wireless LAN, Wired LAN/Wired LAN), Disabling Unused Functions (Enabling/Disabling Protocols/Applications, Enabling/Disabling Remote UI, Enabling/Disabling USB Interface), G3 FAX separation from LAN, USB Port separation from LAN, Prohibit the execution of files stored in Advanced Box in the MFP, Scan and Send -Virus Concerns for E-mail Reception

Device Security

Protecting HDD Data (HDD Data Encryption (FIPS140-2 Validated), HDD Data Overwrite Erase, HDD Lock), Standard HDD Initialize, Trusted Platform Module (TPM), Job Log Conceal Function, Protecting MFD Software Integrity, Checking MFD Software Integrity (Verify System at Startup, Runtime Intrusion Detection), Comply IEEE2600.2 (Common Criteria Certification) (in evaluation)

Device Management and Auditing

Administrator Password, Digital Certificate And Key Management, Audit Log, Cooperating with External Security Audit System (Security Information and Event Management), Image Data Logging, Security Policy Setting

ENVIRONMENTAL SPECIFICATIONS

Operating Environment

Temperature: 10 to 30 °C
Humidity: 20 to 80 % RH (Relative Humidity)

Power source

220-240 V, 50/60 Hz, 6 A

Power consumption

Maximum: Approx. 1,800 W
Copying (with DADF continuous scan): Approx. 1,015 W¹
Standby: Approx. 62.4 W ¹
Sleep mode: Approx. 0.8 W²

¹ Reference value: measured one unit
² 0.8 W is not available in all circumstances due to certain settings.

Typical Electricity Consumption (TEC)^{*} :
iR-ADV DX C5760i: 0.86 kWh (BA model: 0.84 kWh)
iR-ADV DX C5750i: 0.71 kWh (BA model: 0.68 kWh)
iR-ADV DX C5740i: 0.59 kWh (BA model: 0.58 kWh)
iR-ADV DX C5735i: 0.45 kWh

^{*} As per USA Energy Star 3.0

Noise levels (BW/CL)

Sound Power Level (LWA,m)

Active (BW) (1-sided)

iR-ADV DX C5760i: 6.6 B*, Kv 0.3 B*
(BA model: 6.7 B*, Kv 0.3 B*)

iR-ADV DX C5750i: 6.5 B*, Kv 0.3 B*
(BA model: 6.5 B*, Kv 0.3 B*)

iR-ADV DX C5740i: 6.4 B*, Kv 0.3 B*
(BA model: 6.5 B*, Kv 0.3 B*)

iR-ADV DX C5735i: 6.3 B*, Kv 0.3 B*

^{*}Reference value: measured only one unit with ISO7779, described with ISO9296 (2017)

Sound Pressure (LpAm)

Bystander's position:

Active (BW/CL) (1-sided)

iR-ADV DX C5760i: 54 dB¹/54 dB*
(BA model: 54 dB¹/55 dB*)

iR-ADV DX C5750i: 52 dB¹/53 dB*
(BA model: 52 dB¹/53 dB*)

iR-ADV DX C5740i: 52 dB¹/52 dB*
(BA model: 53 dB¹/53 dB*)

iR-ADV DX C5735i: 51 dB¹/51 dB*

Stand-by

iR-ADV DX C5760i/C5750i/C5735i: 26 dB*

iR-ADV DX C5740i: 27 dB*

iR-ADV DX C5760i/C5750i/C5740i (BA model): 24 dB*

^{*} Reference value: measured only one unit with ISO7779, described with ISO9296 (2017)

Blue Angel (only C5735i & BA Models)

Standards

CONSUMABLES

Toner Cartridges

C-EXV 51 Toner BK/C/M/Y
C-EXV 51L Toner C/M/Y

Toner Yield (Estimated @ 5% Coverage)

C-EXV 51 Toner BK: 69,000 pages
C-EXV 51 Toner C/M/Y: 60,000 pages
C-EXV 51L Toner C/M/Y: 26,000 pages

Consumables

Staple-P1
Staple Cartridge-Y1

SOFTWARE AND PRINTER MANAGEMENT

Tracking and reporting

For detailed information please visit our website
<https://www.canon-europe.com/business/>

Universal Login Manager (ULM)
uniFLOW Online Express^{*}

^{*} For more information, please refer to [uniFLOW Online Express](#)
[uniFLOW Online](#)

Remote management tools

iW Management Console
eMaintenance
Content Delivery System

Scanning software

Network ScanGear

Platform

MEAP (Multifunctional Embedded Application Platform)

Document Administration

Kofax Power PDF (Optional)

FIERY PRINT CONTROLLER SPECIFICATIONS (EMBEDDED)

Optional/Standard

For full specifications & options, please visit the Canon website

Name

Optional on all models
imagePASS-P2 V1.1 (Embedded)

Print Resolution (dpi)

600 x 600 : 1200 x 1200

Page Description Language(s)

Adobe PS3, PCL6

Memory

4GB (1 x 4GB)

Hard Disk Drive

500 GB SATA

Processor Speed

Intel Pentium G4400 (3.3 GHz)

System

FS350

PAPER SUPPLY OPTIONS

Cassette Feeding Unit-AM1

Paper Capacity: 2 x 550 sheets (80 gsm)

Paper Type: Thin, Plain, Recycled, Color, Heavy, Bond, Transparency, Pre-punched, Letterhead

Paper Size:

A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R

Custom size: 98.0 x 182.0 mm to 304.8 x 457.2 mm

Paper Weight: 52 to 256 gsm

Power Source: From the Main Unit

Dimensions (W x D x H): 620 x 700 x 251 mm
(attached to the main unit)

Weight: Approx. 22.5 kg



TECHNICAL SPECIFICATIONS

imageRUNNER ADVANCE DX C5700 Series

High Capacity Cassette Feeding Unit-A1	<p>Paper Capacity: 2,450 sheets (80 gsm) Paper Type: Thin, Plain, Recycled, Color, Heavy, Bond, Pre-punched, Letterhead Paper Size: A4 Paper Weight: 52 to 256 gsm Power Source: From the Main Unit Dimensions (W x D x H): 620 x 700 x 251 mm (attached to the main unit) Weight: Approx. 30.0 kg</p>	Booklet Finisher-Y1	<p>(Requires Buffer Pass Unit-L1) (Includes the above Staple Finisher-Y1 basic staple specifications.) Saddle Stitch paper size: A3, A4R, B4 Saddle Stitch Staple Capacity: 20 sheets x 10 sets (52 to 81.4 gsm) (including 1 cover sheet 52 to 256 gsm) Non Staple Folded Bunch Capacity: up to 3 sheets (52 to 105 gsm) Power supply: From the main unit Dimensions (W x D x H): 637 x 623 x 1,142 mm (when the extension tray is extended) Weight: Approx. 57 kg</p>
Paper Deck Unit-F1	<p>Paper Capacity: 2,700 sheets (80 gsm) Paper Type: Thin, Plain, Color, Recycled, Heavy, Pre-punched Paper Size: A4, B5 Paper Weight: 52 to 256 gsm Power Source: From the Main Unit Dimensions (W x D x H): 344 x 630 x 440 mm (attached to the main unit) Weight: Approx. 31 kg</p>	Inner 2/4 Hole Puncher-B1	<p>(Requires the Inner Finisher-H1) Two or Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Two holes: A3, A4, A4R, A5, B4, B5, B5R Four holes: A3, A4 Power Source: From the finisher</p>
OUTPUT OPTIONS*	*Paper capacity may vary with different paper type/size.	Inner 4 Hole Puncher-B1	<p>(Requires the Inner Finisher-H1) Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Four holes: A3, A4, A4R, A5, B4, B5, B5R Power Source: From the finisher</p>
Inner 2way Tray-J1	<p>Tray Capacity (80 gsm) Upper tray: A4, A5, A5R, A6R, B5: 100 sheets SRA3, A3, A4R, B4, B5R: 50 sheets Lower tray (standard tray): A4, A5, A5R, A6R, B5: 250 sheets SRA3, A3, A4R, B4, B5R: 100 sheets Paper Weight: 52 to 300 gsm Dimensions (W x D x H): 420 x 407 x 76 mm Weight: Approx. 0.7 kg</p>	2/4 Hole Puncher Unit-A1	<p>(Requires either the Staple Finisher-Y1 or Booklet Finisher-Y1) Two or Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Two holes: A3, A4, A4R, A5, B4, B5, B5R Four holes: A3, A4 Power Source: From the finisher</p>
Copy Tray-J2	<p>Capacity (80gsm): A4, A5, A5R, A6R, B5: 100 sheets SRA3, A3, A4R, B4, B5R: 75 sheets Dimensions (W x D x H): 442 x 373 x 176 mm (attached to the main unit, when the extension tray is extended) Weight: 0.5 kg</p>	4 Hole Puncher Unit-A1	<p>(Requires either the Staple Finisher-Y1 or Booklet Finisher-Y1) Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Four holes A3, A4, A4R, A5, B4, B5, B5R Power Source: From the finisher</p>
Inner Finisher-H1	<p>Tray Capacity (80gsm): Upper Tray: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R : 45 sheets Lower Tray: A4, A5, A5R, B5: 500 sheets, SRA3, A3, A4R, B4, B5R, : 250 sheets, A6R: 30 sheets Envelope: 10 sheets Paper Weight: 52 to 300 gsm Staple Position: Corner, Double Staple Capacity: A4, B5: 50 sheets (52 to 90 gsm) A3, A4R, B4: 30 sheets (52 to 90 gsm) Eco Staple: A3, A4, B4, B5: 5 sheets (52 to 64 gsm) 4 sheets (65 to 81.4 gsm) 3 sheets (82 to 105 gsm) Staple On Demand: 40 sheets (80 gsm) Power supply: From the main unit Dimensions (W x D x H): 585 x 525 x 225 mm (when the extension tray is extended) Weight: Approx. 8.6 kg</p>	HARDWARE ACCESSORIES	
Staple Finisher-Y1	<p>(Requires Buffer Pass Unit-L1) Tray Capacity (80gsm): Upper Tray: A4, A5, A5R, A6R, B5: 250 sheets, SRA3, A3, A4R, B4, B5R: 125 sheets Lower Tray: A4, A5, A5R, B5: 3,000 sheets SRA3, A3, A4R, B4, B5R: 1,500 sheets, A6R: 250 sheets Envelopes: Monarch: 30 sheets, COM10 No.10, DL, ISO-C5: 100 sheets Paper Weight: Upper Tray 52 to 256 gsm, Lower Tray 52 to 300 gsm Staple Position: Corner, Double Staple Capacity: A4, B5: 50 sheets (52 to 90 gsm) A3, A4R, B4: 30 sheets (52 to 90 gsm) Eco Staple: A3, A4: 5 sheets (52 to 64 gsm) 4 sheets (65 to 81.4 gsm) 3 sheets (82 to 105 gsm) Staple On Demand: 50 sheets (52 to 90 gsm) Dimensions (W x D x H): 637 x 623 x 1,142 mm (when the extension tray is extended) Weight: Approx. 31 kg</p>	Card Readers	<p>Various card readers available e.g. MiCard Plus. Please contact local Canon Office for more details. Copy Card Reader-F1 Copy Card Reader Attachment-B7</p>
		Others	<p>Tab Feeding Attachment-F1 Utility Tray-B1 Buffer Pass Unit-L1 Numeric Keypad-A1</p>
		SECURITY OPTIONS	
		Data Security	<p>HDD Mirroring Kit-J1 2.5inch/250GB HDD-N1 2.5inch/1TB HDD-P1</p>
		SYSTEM AND CONTROLLER OPTIONS	
		Print Accessories	<p>PCL International Font Set-A1 Barcode Printing Kit-D1 imagePASS-P2 V1.1</p>
		Barcode Printing	
		EFI-Fiery Based Controller System Accessories	<p>Copy Control Interface Kit-A1 Serial Interface Kit-K3 Connection Kit-A2 for Bluetooth LE NFC Kit-E1</p>
		Fax Accessories	<p>Super G3 FAX Board-AS1 Super G3 2nd Line Fax Board-AS1 Remote Fax Kit-A1 IP FAX Expansion Kit-B1</p>
		OTHER OPTIONS	
		Accessibility Accessories	<p>ADF Access Handle-A1 Voice Guidance Kit-G1 Voice Operation Kit-D1</p>

Software & Solutions



Certifications and compatibility



Canon Inc.
 canon.com
 Canon Europe
 canon-europe.com
 English edition
 © Canon Europa N.V., 2020